


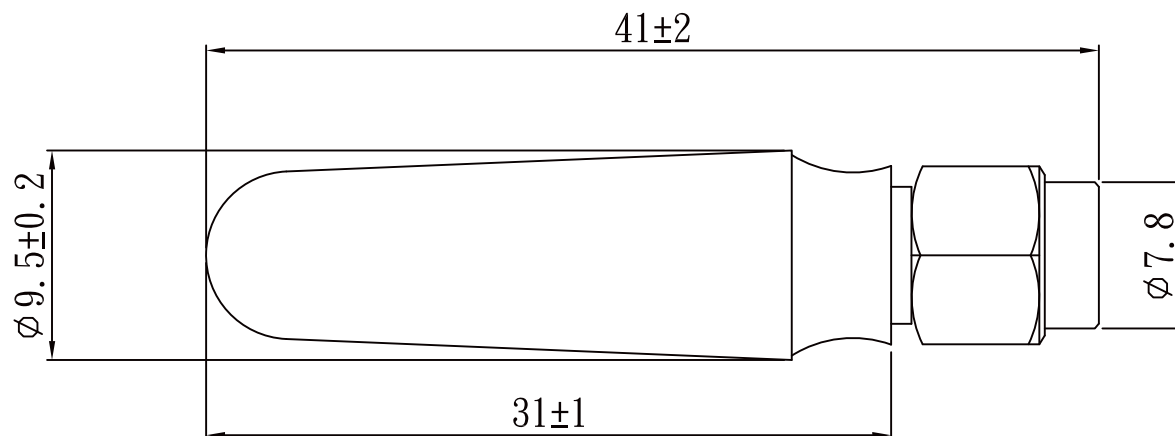

Connector SMA PLUG
Frequency Range: 824~960 MHz/
1710~1880 MHz/1990~2170 MHz
Impedance: 50 Ω (Typ.)

BOM表:

序號	材料規格	說明	用量	材料廠商	備注
1	CONN:SMA 公頭		1pcs		ROHS
2					ROHS
3					ROHS
4					ROHS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

ANTSMA-1S1S-M4C1-LF

SERIES

ST/ST

41mm

MALE

LEADFREE

DESCRIPTION: