

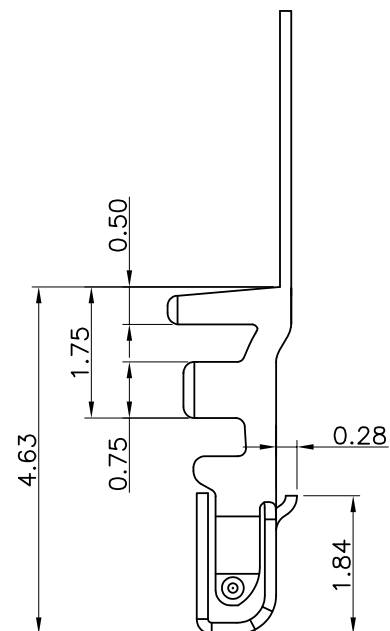
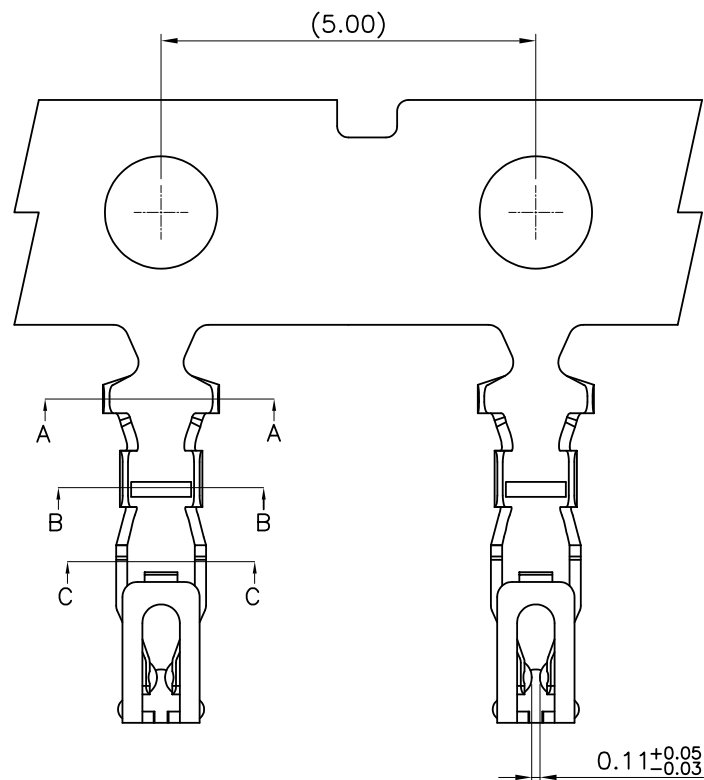


Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.15\text{mm}$.
2. FINISH: --TIN-PLATED OVER NICKEL.
--GOLD FLASH OVER NICKEL.
3. APPLICABLE WIRE RANGE: AWG#24~#28
4. INSULATION O.D.: $\phi 1.15\text{mm}(\text{MAX.})$
5. PACKING: 12K/REEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ± 0.30
.X, ± 0.25
.XX, ± 0.15
.XXX, ± 0.08
ANG $\pm 3^\circ$





PPOJECTION

照片框

ORDER INFORMATION

AUH-Tx-24-LF
SERIES T LEADFREE
24 AWG
BLANK:TIN
G:GOLD FLASH
TERMINAL

DESCRIPTION: WIRE TO BOARD, PLUG, PITCH1.50mm, CRIMP TYPE, Contac

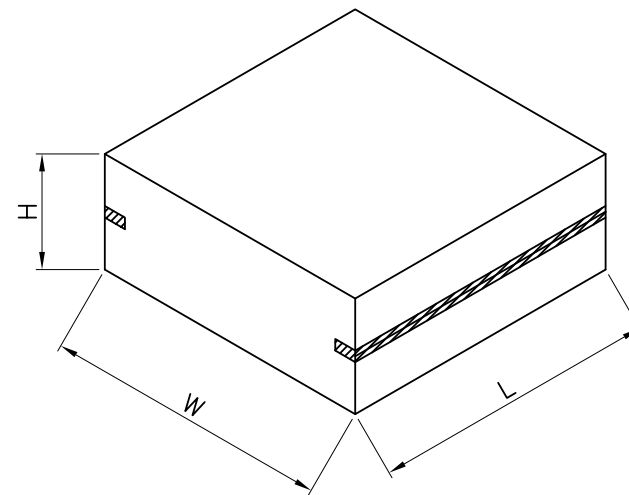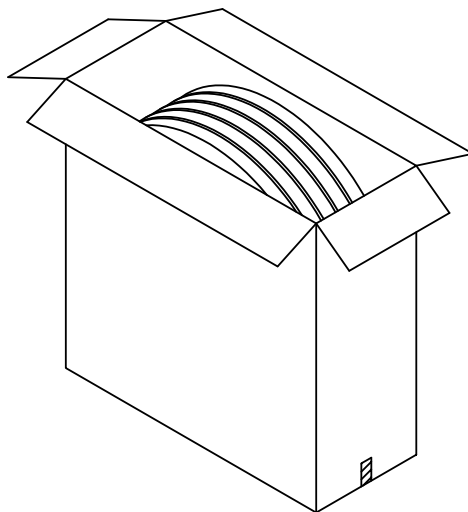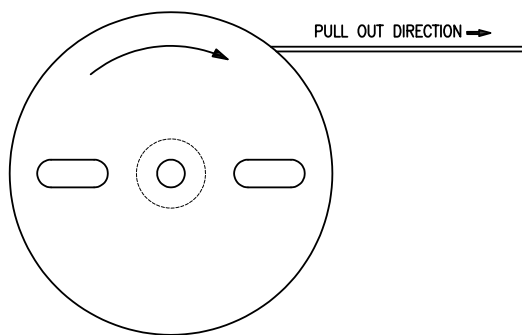

PACKING MATERIAL

PART NAME	DIM(mm)
CARTON	470*470*210

PACKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
AUH-T-24	12,000 PCS/RE	8 RE/BC	96,000 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

AUH-Tx-24-LF
SERIES | T LEADFREE
24 AWG
BLANK:TIN
G:GOLD FLASH
TERMINAL

DESCRIPTION: WIRE TO BOARD, PLUG, PITCH1.50mm, CRIMP TYPE, CONTAC