

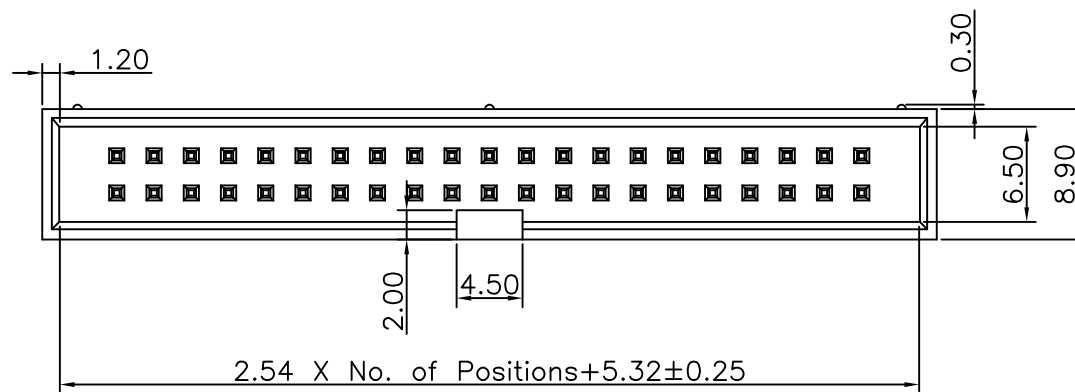


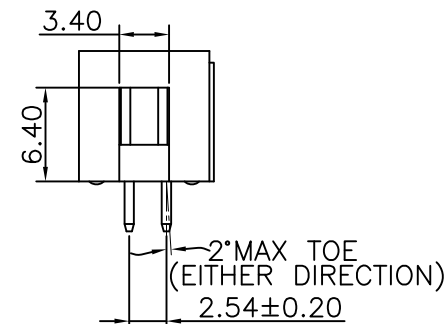


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon (無鹵) or the equivalent material

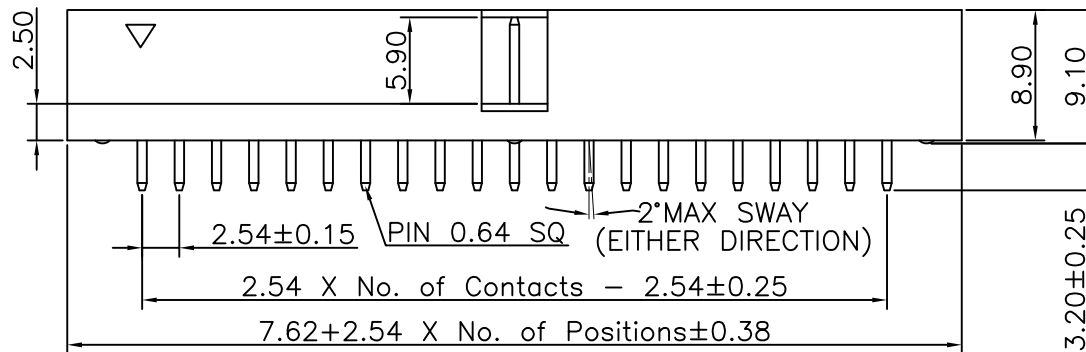

Recommended P.C.Board Layout
 (Tolerance: ±0.05)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

B-D-xx-LF
 SERIES LEADFREE
 06~64WAY
 DIP 180°

DESCRIPTION: 2.54 BOX HEADER DUAL ROW DIP TYPE CONNECTOR