
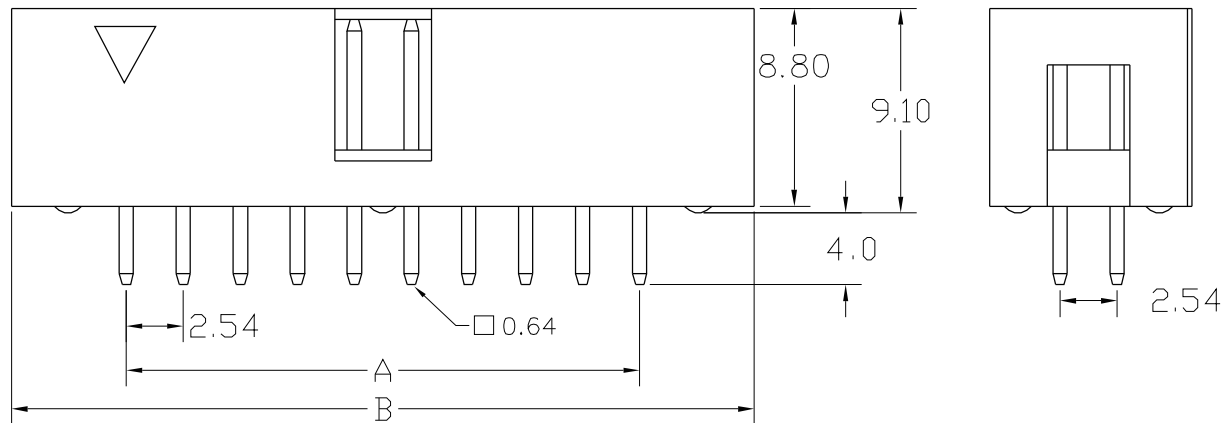
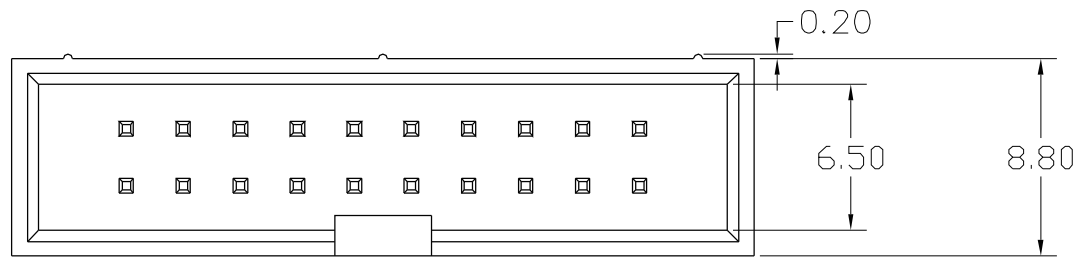


No. of Contacts	DIMENSIONS	
	A	B
6	5.08	15.27
8	7.62	17.81
10	10.16	20.35
14	15.24	25.43
16	17.78	27.97
20	22.86	33.05
24	27.94	38.13
26	30.48	40.67
30	35.56	45.75
34	40.64	50.83
40	48.26	58.45
44	53.34	63.53
48	58.42	68.61
50	60.96	71.15
60	73.66	83.85
64	78.74	88.93

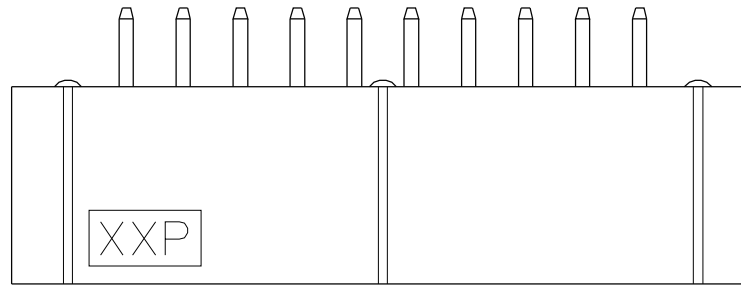


SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 5000 Megohms Min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° - +105°C
 Contact Material: Copper alloy
 Insulator Material: Polyester,UL 94V-0

©Standard:P.B.T

Contact Plating:Gold Flash

Recommended P.C.Board Hole Layout
 (P.C.B Tolerance:±0.05)

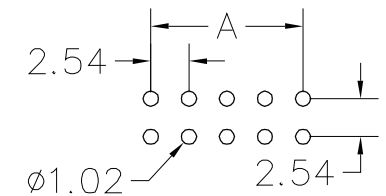

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

B-DD40-xx-LF
 SERIES | T | LEADFREE
 06~64WAY
 DIP 4.0mm
 DIP 180°

DESCRIPTION: