
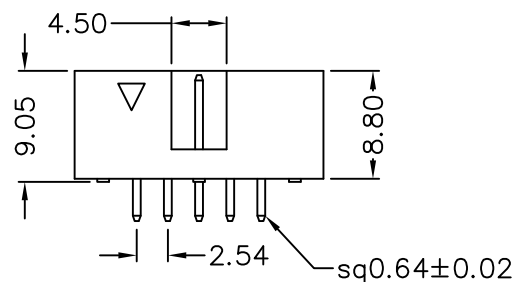
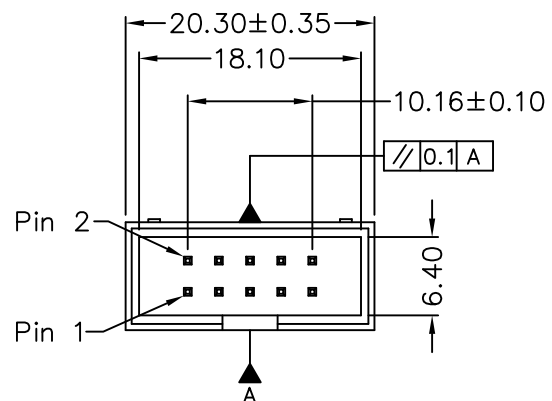


Recommended P.C.B Layout
Tolerance: ± 0.03

MATERIAL

Insulator: PBT UL94-V0
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -25°C to $+85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm 3^{\circ}$

照片框

ORDER INFORMATION

B-DS05-10-LF
SERIES | LEADFREE
10 WAY
SEMI GOLD 5u"
DIP 180°

DESCRIPTION: BOX HEADER 2.54*2.54mm, STRAIGHT TYPE