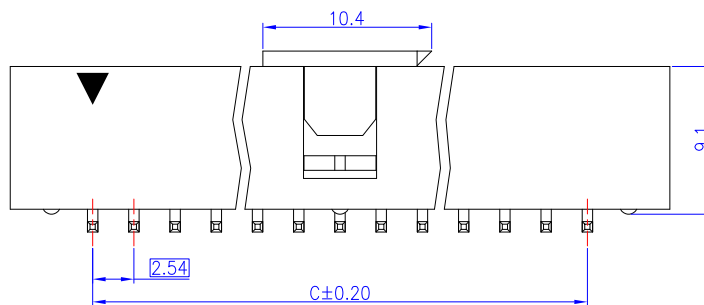
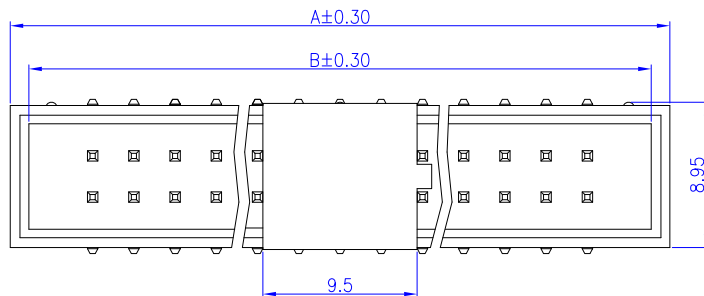


PCB Layout
(Top View)

Material and Finish

1. Housing: Thermoplastic (UL94V-0), Black.
2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.
3. Cap: Nylon 6T, Black.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Dimensions				Dimensions			
Pos.	A	B	C	Pos.	A	B	C
06	15.24	12.94	5.08	24	38.10	35.80	27.94
08	17.78	15.48	7.62	26	40.64	38.34	30.48
10	20.32	18.02	10.16	30	45.72	43.42	35.56
12	22.86	20.56	12.70	34	50.80	48.50	40.64
14	25.40	23.10	15.24	40	58.42	56.12	48.26
16	27.94	25.64	17.78	44	63.50	61.20	53.34
20	33.02	30.72	22.86	50	71.12	68.82	60.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.15

UNIT / mm

SCALE 1 : 1

.XX ± 0.10

.XXX ± 0.05

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

B-VC-xx-LF
SERIES LEADFREE
06-50WAY
CAP
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54mm Box Header PCB Surface Mount Type Dual Rows, Tray Package with Cap