
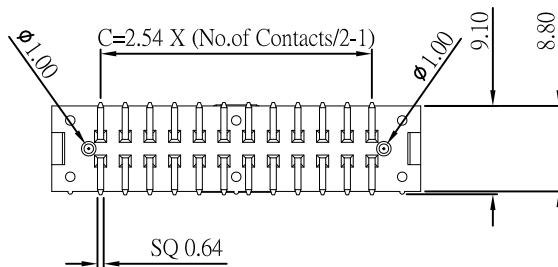
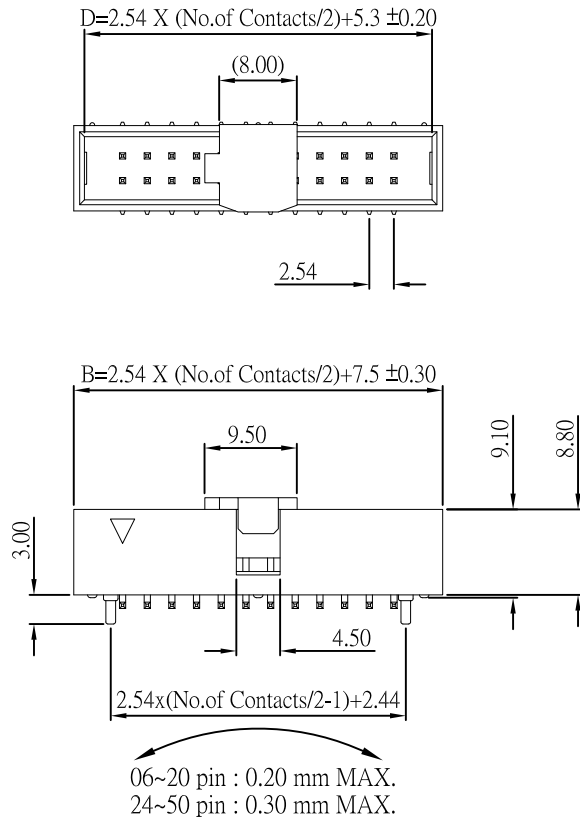
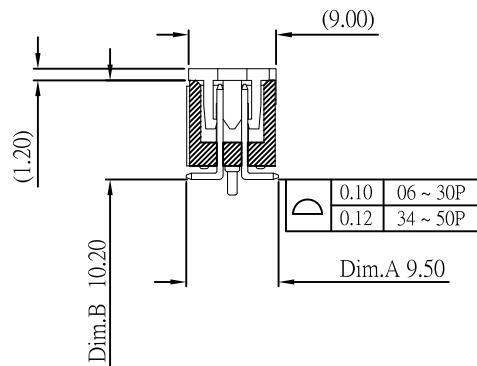


Recommended P.C. Board
SMD Layout

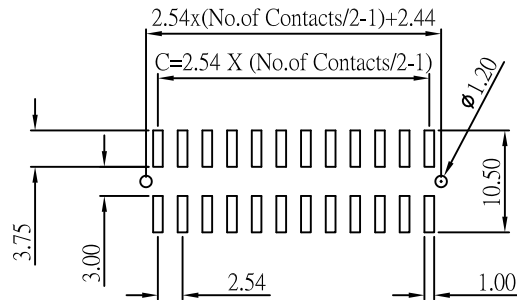

Current Rating and Voltage: 3 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 1000 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Standard: Brass
Insulator Material: High Temperature
Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

Table-1

CONTACTS	06 pin	08 pin	10 pin	12 pin	14 pin	16 pin	18 pin	20 pin
B	15.12	17.66	20.20	22.74	25.28	27.82	30.36	32.90
C	05.08	07.62	10.16	12.70	15.24	17.78	20.32	22.86
D	12.82	15.36	17.90	20.44	22.98	25.52	28.06	30.60
CONTACTS	24 pin	26 pin	30 pin	34 pin	40 pin	44 pin	50 pin	
B	37.98	40.52	45.60	50.68	58.30	63.38	71.00	
C	27.94	30.48	35.56	40.64	48.26	53.34	60.96	
D	35.68	38.22	43.30	48.38	56.00	61.08	68.70	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

B-VPC-xx-LF
SERIES | LEADFREE
06~50WAY
CAP
POST
180°SMT

DESCRIPTION: