
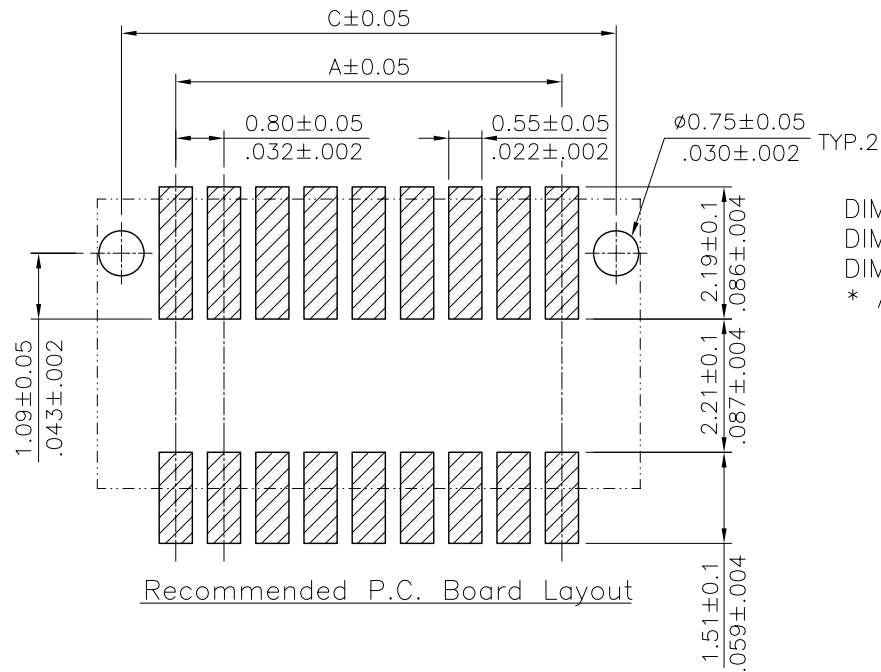


Material:



\* Housing : Nylon 6T With 30% GF.  
UL 94V-0 Color Black

\* Contact: Phosphor Bronze

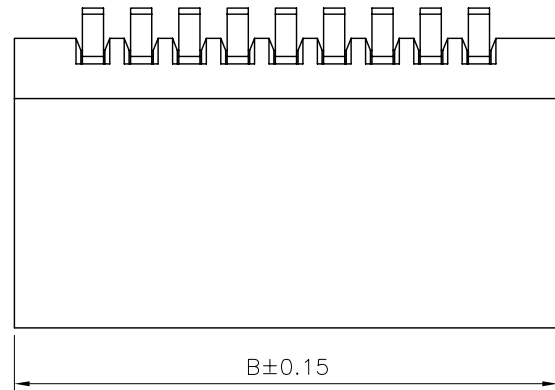

DIM A = 0.8 x No. of Spaces  
DIM B = DIM A + 2.6  
DIM C = DIM A + 1.8  
\* AVAILABLE IN 6 THROUGH 36  
CIRCUITS

Recommended P.C. Board Layout

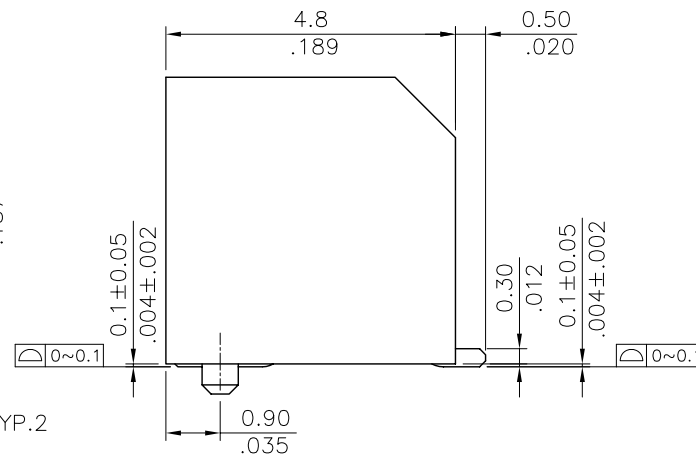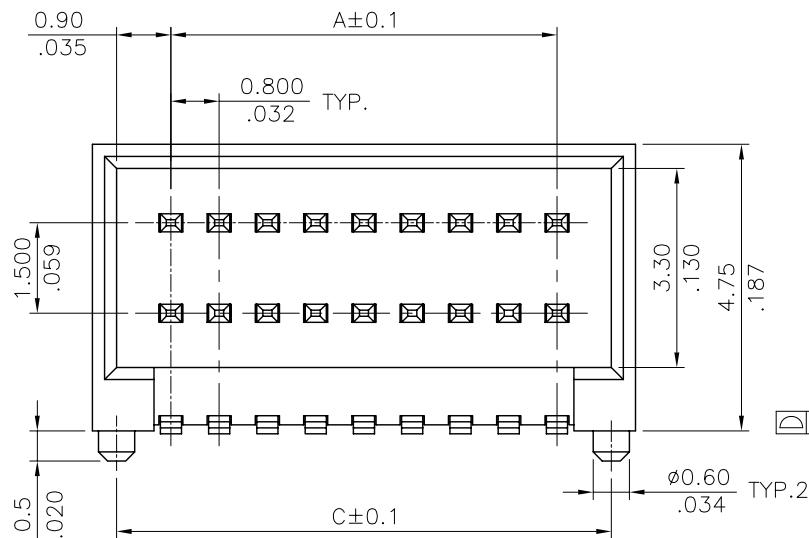

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.08  
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

B85-WPR-xx-LF  
SERIES REEL POST 90°SMT  
LEADFREE  
06~36 WAY



DESCRIPTION:

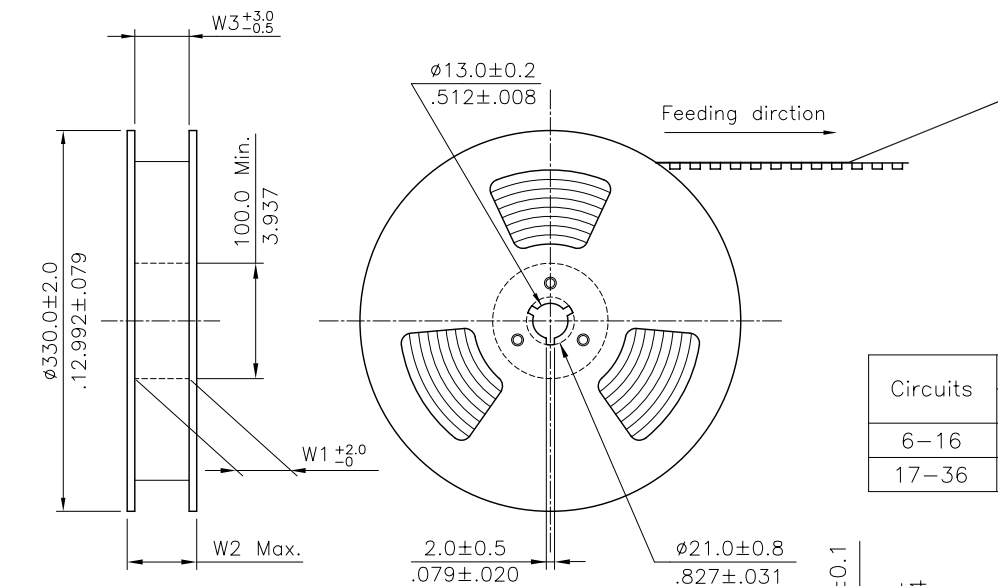


# NOTE :

- \* Reel Material : HIPS
- \* Carrier Material : Transparent, Conductive Polystyrene Alloy
- \* Cover Tape Material : Polyester
- \* Cover Tape Peel Strength : 0.1N – 1.3N
- \* Carrier camber is within 1mm in 100mm
- \* All dimensions meet EIA-481-B requirements.
- \* Quantity : 800 PCS/Reel

| Circuits | Dimension  |   |            |             |            | Packing<br>(Reel/Carton) |
|----------|------------|---|------------|-------------|------------|--------------------------|
|          | E          | F | W1         | W2          | W3         |                          |
| 6-16     | 16.0(.630) | - | 16.5(.650) | 22.5(.886)  | 16.5(.650) | 11                       |
| 17-36    | 24.0(.945) | - | 24.5(.965) | 30.5(1.200) | 24.5(.965) | 9                        |

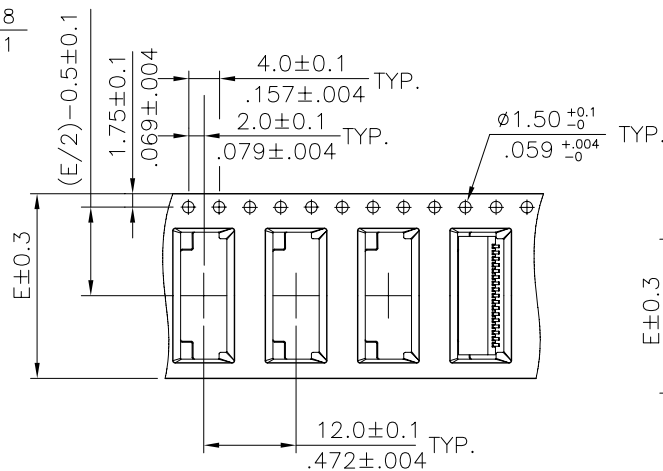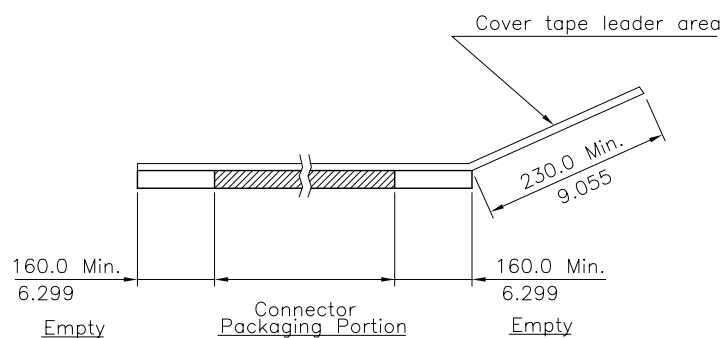

WIDTH : 24 mm Carrier

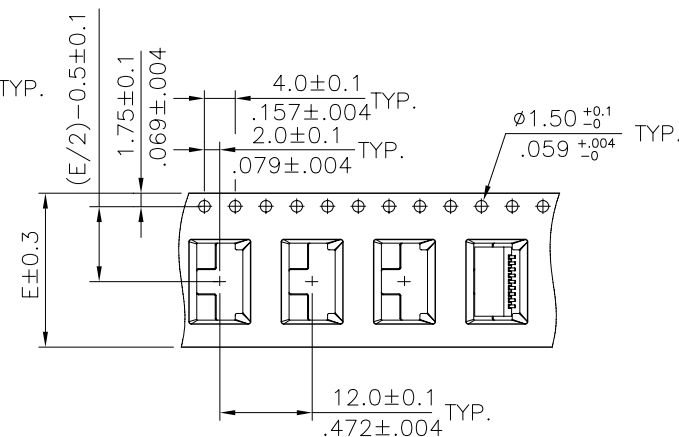

WIDTH : 16 mm Carrier

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.08  
ANG ±

照片框

ORDER INFORMATION

B85-WPR-xx-LF  
SERIES REEL POST 90°SMT  
LEADFREE  
06-36 WAY

DESCRIPTION:

www.morethanall.com