
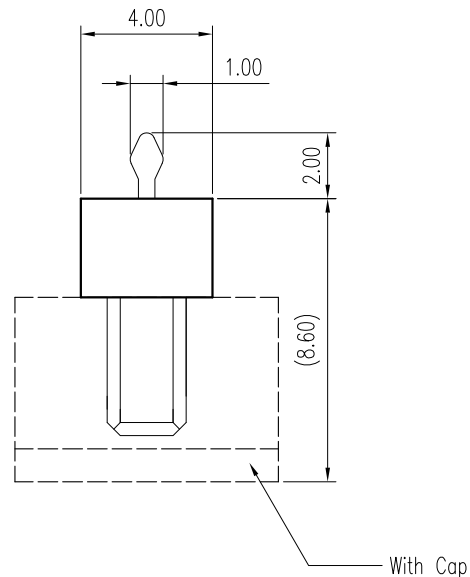



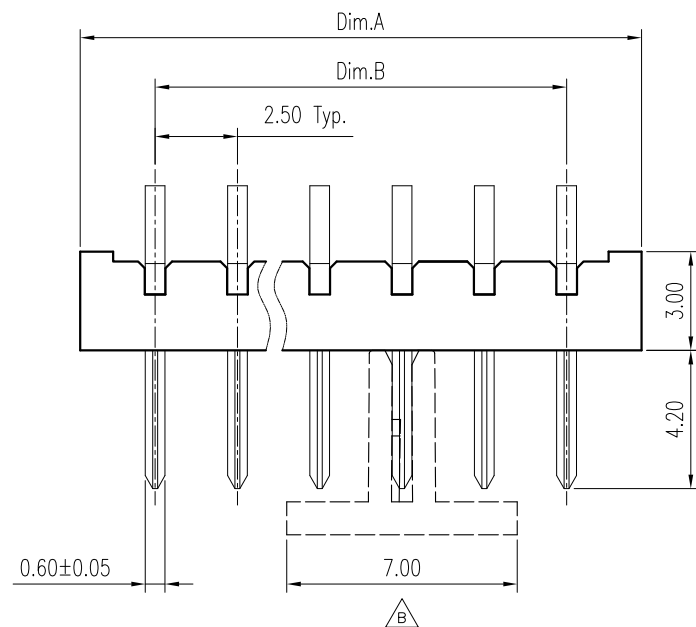


Notes:

1. Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Copper Alloy
2. Finish:
Terminal: Selected Gold on Contact Area,
G/F on Solder Tails, Both Over
50u" Min. Ni Under-plated Overall

△ Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C
BCC25-PD30-04	4		12.05	7.50	3.775
BCC25-PD30-05	5		14.55	10.00	3.775
BCC25-PD30-06	6		17.05	12.50	3.775
BCC25-PD30-07	7		19.55	15.00	6.275
BCC25-PD30-08	8		22.05	17.50	6.275
BCC25-PD30-09	9		24.55	20.00	8.775
BCC25-PD30-10	10		27.05	22.50	8.775

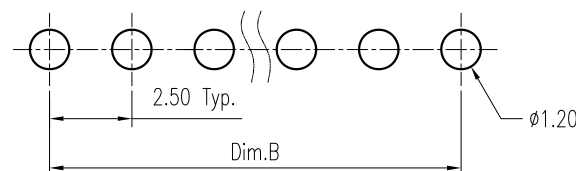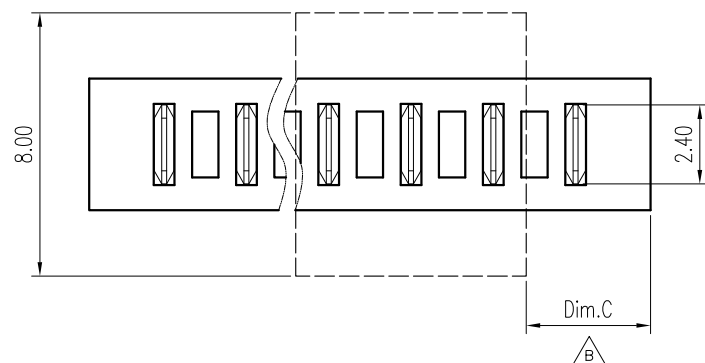

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.13
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCC25-PD30-xx-LF

SERIES

LEADFREE
04~10 WAY
HIGH 3.0mm
DIP 180°
MALE

DESCRIPTION: 2.5mm Pitch Battery Conn. Male Type