

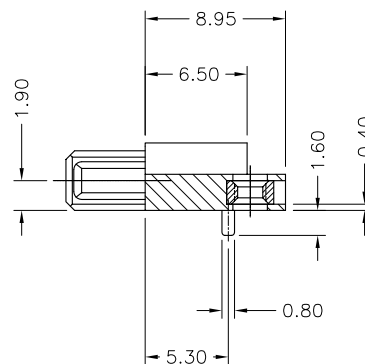
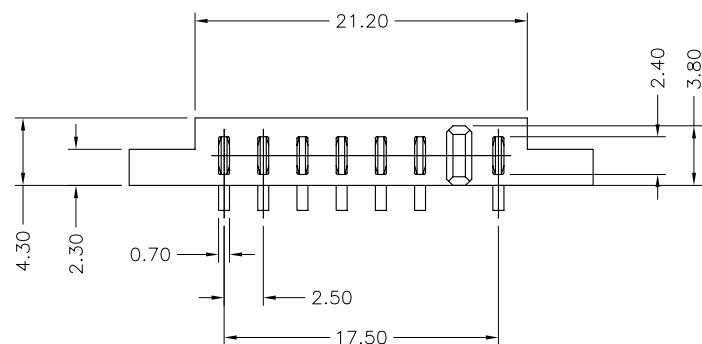


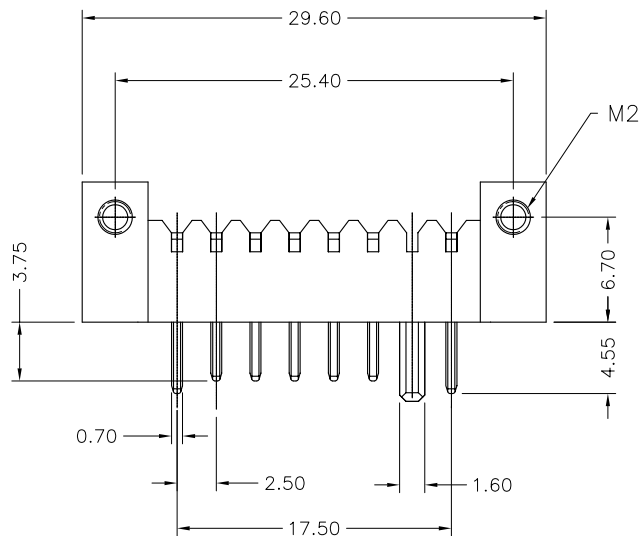

Environmental:
Operation Temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

3	Nut	2	Copper Alloy	Base plating Nickel over all	M2
2	Contact	7	Copper Alloy	Au plating at contact area	t=0.50 mm
1	Housing	1	Thermoplastic	Matte Tin plating at solder tail	UL94V-0
No	Description	Qty	Material	Finish	Remarks

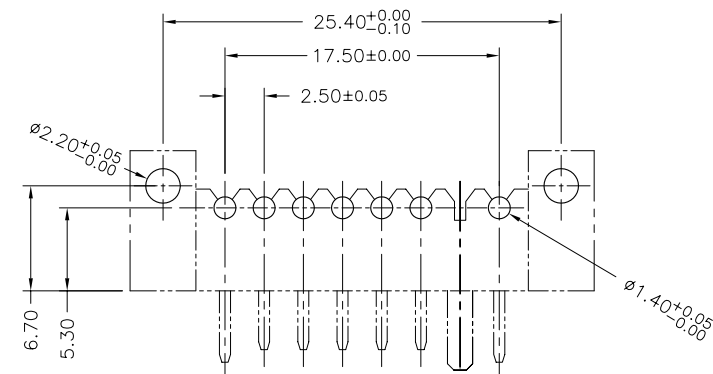

Recommended PCB Layout (Top View)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCC25-PR43R2E14-07-LF

SERIES

LEADFREE

07 WAY

EAR TO PIN 1.4mm

RIGHT 2

FEMALE

HIGH 4.3mm

DIP 90°

DESCRIPTION: Power Connector Male 7 Pin Lead Free