

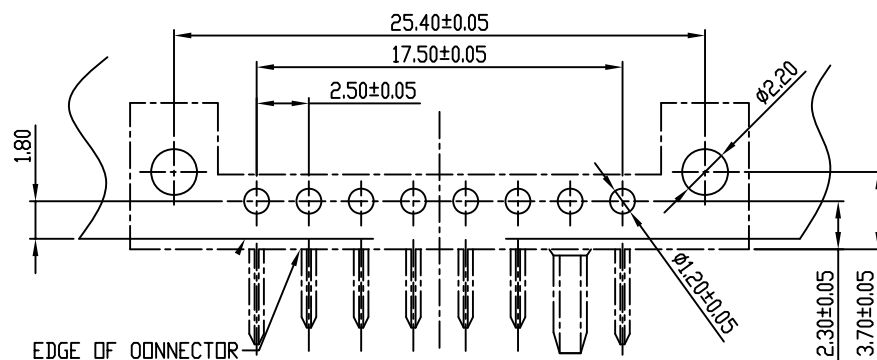
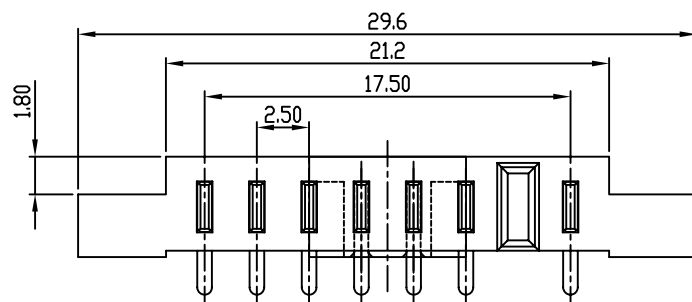
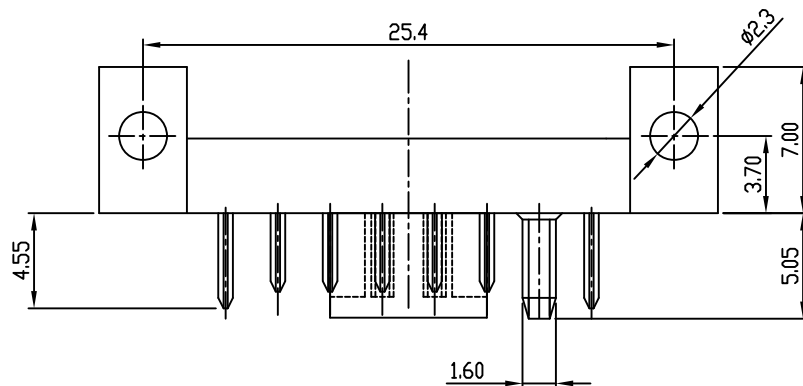




EDGE OF CONNECTOR

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

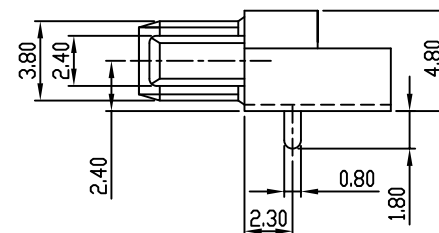

FOR REFERENCE ONLY

NOTES :

1. MATERIAL :

a. HOUSING : LCP E130I 30% G/F FILLED, OR OTHER HIGH PERFORMANCE RESINS, UL94V-0 RATED.

b. TERMINAL : BRASS, JIS C2680 R-SH, OR OTHER EQUIVALANT COPPER ALLOYS, t=0.60

2. FINISH : GOLD PLATING IN THE CONTACT AREA, AND SELECTIVE PLATING IN THE SOLDER TAIL AREA, WITH 50u"(min.) NICKEL UNDERPLATING OVERALL.

3. P.C.B. LAUOUT TOLERANCE : ±0.10

禁用環境管理物質如下.....等:

a. 鎳及鎳化合物,	b. 石棉,
b. 鉛及鉛化合物,	i. 偶氮化合物,
c. 汞及汞化合物,	j. 甲脞,
d. 六價鉻化合物,	k. 聚乙烯混合料,
e. 多溴聯苯, 多溴聯苯醚,	l. 臭氣危害物質,
f. 有機氯化物,	m. 放射性物質,
g. 有機錫化合物,	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCC25-PR48R2E14-07-LF

SERIES

LEADFREE

07 WAY

EAR TO PIN 1.4mm

RIGHT 2

MALE HIGH 4.8mm

DIP 90°

DESCRIPTION: BATTERY CONN. MALE, DIP PITCH=2.50mm