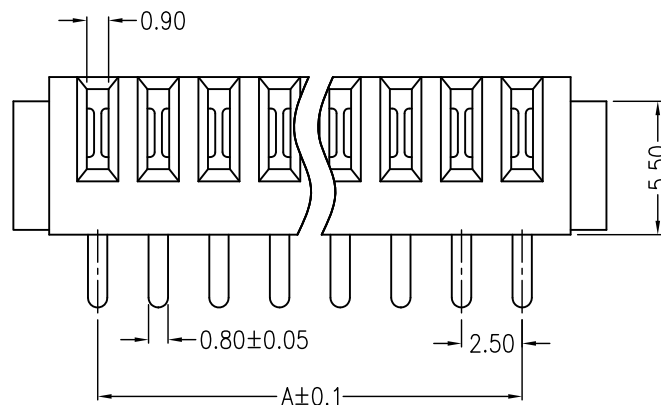
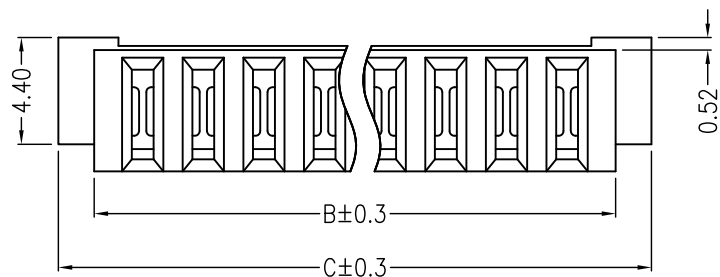


No. of Pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.E
03	5.00	9.00	11.95	2.0/3.1
04	7.50	11.50	14.45	2.0/3.1
05	10.00	14.00	16.95	2.0/3.1
06	12.50	16.50	19.45	2.0/3.1
07	15.00	19.00	21.95	2.0/3.1
08	17.50	21.50	24.45	2.0/3.1
09	20.00	24.00	26.95	2.0/3.1
10	22.50	26.50	29.45	2.0/3.1

Material

Insulator : Nylon 9T (UL94V-0)

Contact : Phosphor Bronze

Contact Plated : Gold over Nickel or Tin

Specification

Current Rating : 5A

Instant Current : 7A

Contact Resistance : 30mΩ

Insulation Resistance : 1000MΩ

Dielectric Voltage : 500V

Operating Temperature : -30°C~+70°C

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

照片框

ORDER INFORMATION

BCC25-SD65X-xx-LF

SERIES

LEADFREE

03~10WAY

NON POST

HIGH 6.5mm

DIP 180°

FEMALE

DESCRIPTION: 2.5mm Battery Connector Female 180°