


(左防呆)

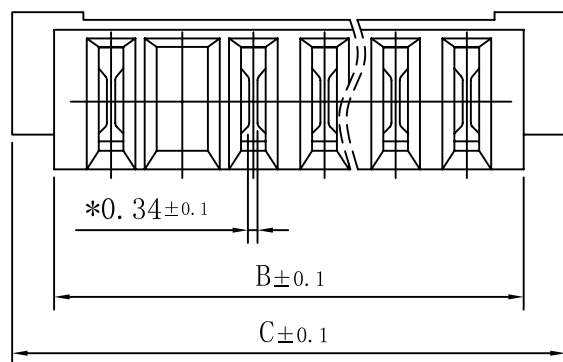

左防呆	Dim. A	Dim. B	Dim. C
BCC25-SDxxL2-03	7.5	11.5	14.45
BCC25-SDxxL2-04	10.0	14.0	16.95
BCC25-SDxxL2-05	12.5	16.5	19.45
BCC25-SDxxL2-06	15.0	19.0	21.95
BCC25-SDxxL2-07	17.5	21.5	24.45
BCC25-SDxxL2-08	20.0	24.0	26.95
BCC25-SDxxL2-09	22.5	26.5	29.45
BCC25-SDxxL2-10	25.0	29.0	31.95

*Material

Insulator: PA-6T (UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold over Nickel .

*Ratings

Rating current: 5.0 A/pin.

Instant current: 7.0/pin.

Rating voltage: 125 V AC/1 minute.

Operating temperature: -40℃ to +105℃.

Resistance to soldering: 260℃, 5 second.

*Electrical Characteristic

Withstanding Voltage: DC 500V .



Insulation Resistance: 100 MΩ Min..

Contact Resistance: 30mΩ Max..

*Mechanical Characteristic

Mating force: 150g/pin max..

Contact retention force: 500g min..

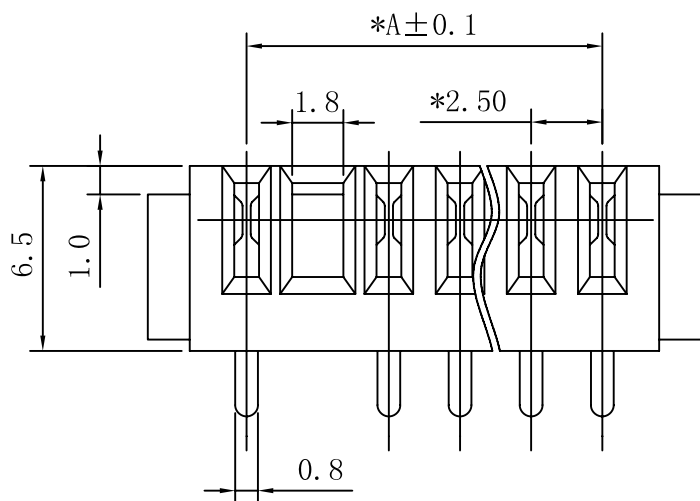

	BCC25-SD15L2-xx	BCC25-SD23L2-xx	BCC25-SD30L2-xx
DIM. E	1.5±0.25mm	2.3±0.25mm	3.0±0.25mm

	項次	名稱	零件料號	數量
BCC25-SDxxL2-xx (左防呆)	1	膠芯	BCC25-H	1 PCS
	2	端子	BCC25-T	依膠芯pin數

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCC25-SDxxL2-xx-LF

SERIES

LEADFREE

03~10WAY

LEFT 2

FEMALE

D15:DIP 1.5mm

D23:DIP 2.3mm

D30:DIP 3.0mm

DESCRIPTION: