


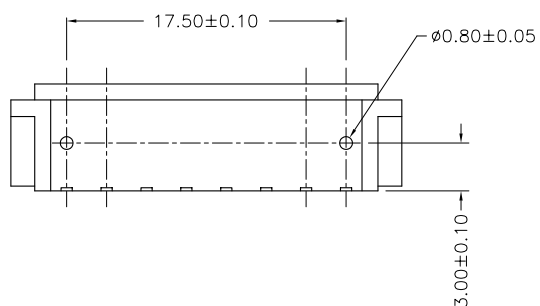
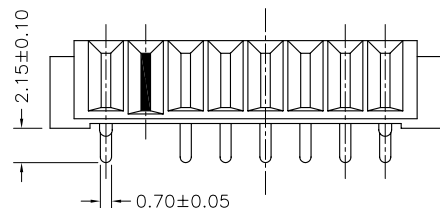


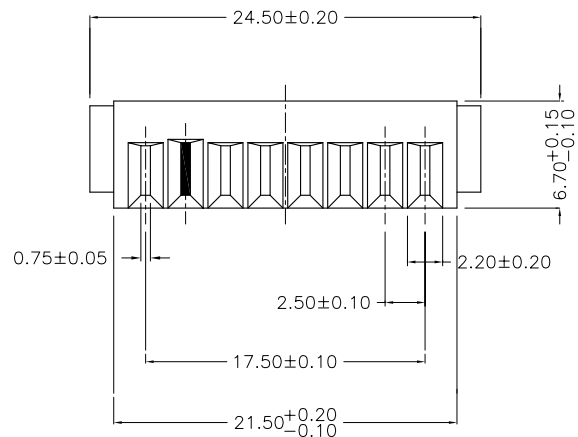

NOTE :

1. General Tolerance : ± 0.30 mm
2. P.C.B. Layout Tolerance : ± 0.10 mm
3. Material
Insulator : High Temperature Nylon Resin
Zytel HTN ER52G30L NC010
Contact : Phosphor Bronze
First Copper C5191
Contact Plated : Gold 0.1μ m Min.
Over Nickel Plated

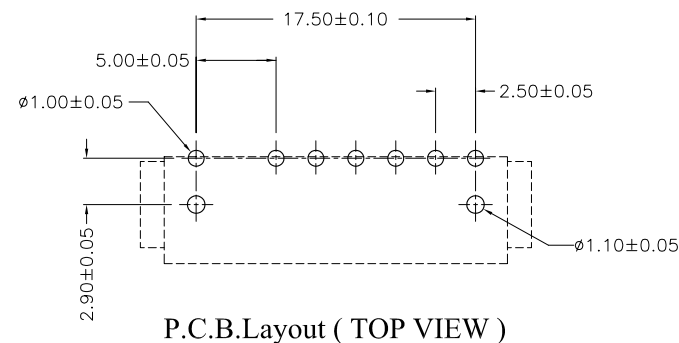

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCC25-SR21R2P-07-LF

SERIES
LEADFREE
07 WAY
POST
RIGHT 2
DIP 90°/2.15mm
FEMALE

DESCRIPTION: Power Connector Female 7 Pin