

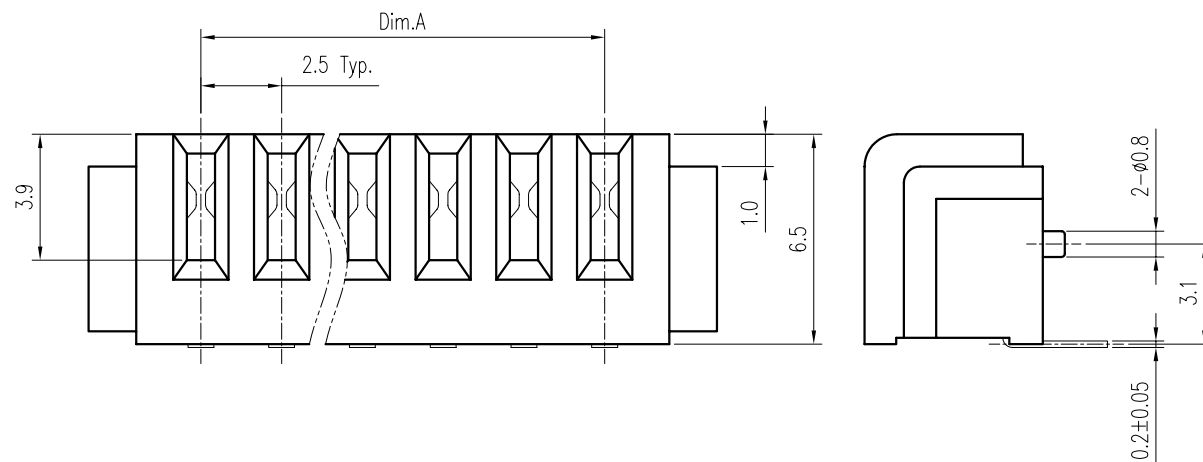


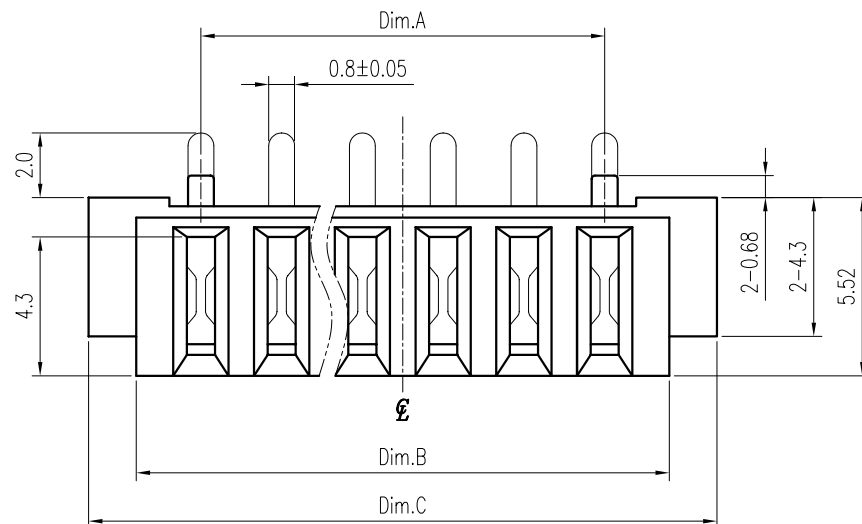

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C
BCC25-SR55P-03	3	3	5.0	9.0	11.95
BCC25-SR55P-04	4	4	7.5	11.5	14.45
BCC25-SR55P-05	5	5	10.0	14.0	16.95
BCC25-SR55P-06	6	6	12.5	16.5	19.45
BCC25-SR55P-07	7	7	15.0	19.0	21.95
BCC25-SR55P-08	8	8	17.5	21.5	24.45
BCC25-SR55P-09	9	9	20.0	24.0	26.95
BCC25-SR55P-10	10	10	22.5	26.5	29.45
BCC25-SR55P-11	11	11	25.0	29.0	31.95

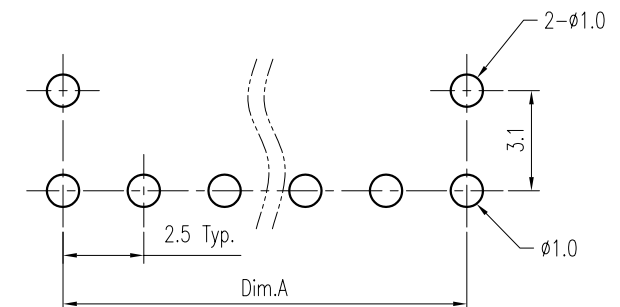

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

- Notes: 1. Material :
Housing : Thermoplastic, UL 94V-0
Terminal : Copper Alloy
2. Finish :
Terminal : Selected Gold on Contact Area, 1u"Min. Gold on Solder Tails, Both over 50u" Min. Ni Under-plated Overall

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

BCC25-SR55P-xx-LF

SERIES | POST | LEADFREE
03~11WAY
HIGH 5.52mm
DIP 90°
FEMALE

DESCRIPTION: 2.5mm Pitch Battery Conn. Female Type