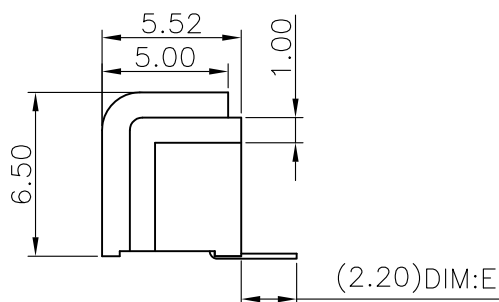
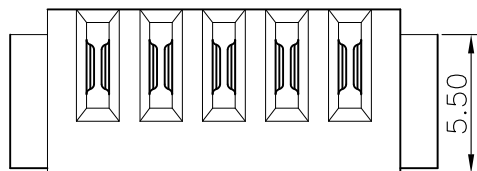
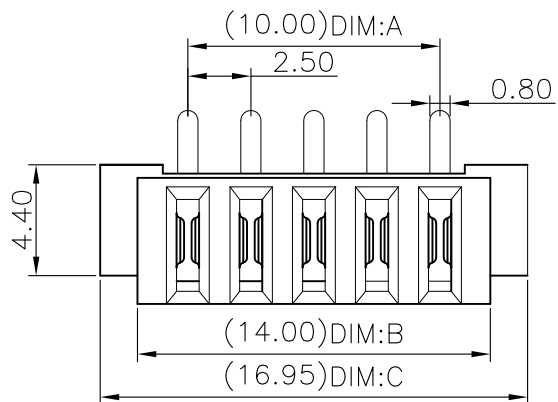


Recommended P.C.B Layout

Layout Tolerance=+/-0.05mm

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Current rating:7A

instant CURRENT:10A

Contact Resistance:30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:500V

Operdting Temperature:-40°~105°

| No: of pins | Dimension |        |        |        |
|-------------|-----------|--------|--------|--------|
|             | DIM. A    | DIM. B | DIM. C | DIM. E |
| 03          | 5.00      | 9.00   | 11.95  | 2.20   |
| 04          | 7.50      | 11.50  | 14.45  | 2.20   |
| 05          | 10.00     | 14.00  | 16.95  | 2.20   |
| 06          | 12.50     | 16.50  | 19.45  | 2.20   |
| 07          | 15.00     | 19.00  | 21.96  | 2.20   |
| 08          | 17.50     | 21.50  | 24.45  | 2.20   |
| 09          | 20.00     | 24.00  | 26.95  | 2.20   |
| 10          | 22.50     | 26.50  | 29.45  | 2.20   |
| 11          | 25.00     | 29.00  | 31.95  | 2.20   |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

BCC25-SR55X-xx-LF

SERIES

LEADFREE

03~11WAY

NON POST

HIGH 5.52mm

DIP 90°

FEMALE

DESCRIPTION: 2.5PH刀式電池座母座90° DIP