


(右防呆)

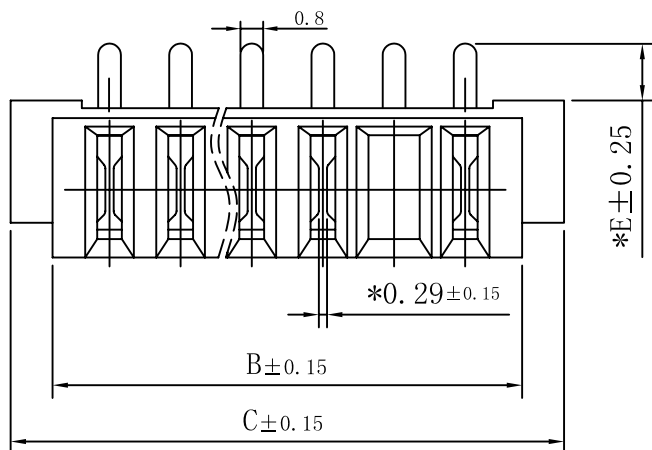

右防呆	Dim. A	Dim. B	Dim. C
BCC25-SRxxR2-03	7.5	11.5	14.45
BCC25-SRxxR2-04	10.0	14.0	16.95
BCC25-SRxxR2-05	12.5	16.5	19.45
BCC25-SRxxR2-06	15.0	19.0	21.95
BCC25-SRxxR2-07	17.5	21.5	24.45
BCC25-SRxxR2-08	20.0	24.0	26.95
BCC25-SRxxR2-09	22.5	26.5	29.45
BCC25-SRxxR2-10	25.0	29.0	31.95

*Material

Insulator: PA-6T(UL94V-0).

Contact: Copper Alloy.

Contact Plated: Gold over Nickel .

*Ratings

Rating current:5.0 A/pin.

Instant current:7.0/pin.

Rating voltage:125 V AC/1 minute.

Operating temperature:-40℃ to +105℃.

Resistance to soldering: 260℃,5 second.

*Electrical Characteristic

Withstanding Voltage: DC 500V .



Insulation Resistance: 100 MΩ Min..

Contact Resistance: 30mΩ Max..

*Mechanical Characteristic

Mating force: 150g/pin max..

Contact retention force: 500g min..

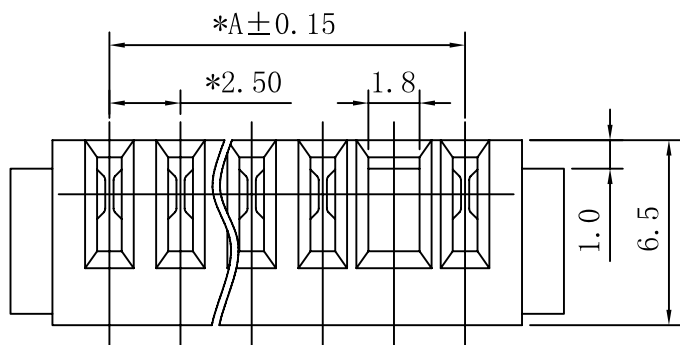

	BCC25-SR20R2-xx	BCC25-SR25R2-xx
DIM. E	2.0±0.25mm	2.5±0.25mm

	項次	名稱	零件料號	數量
BCC25-SRxxR2-xx (右防呆)	1	膠芯	BCC25-H	1 PCS
	2	端子	BCC25-T	依膠芯pin數

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

BCC50-SRxxR2-xx-LF

SERIES

FEMALE

20:2.0mm

25:2.5mm

DIP 90°

LEADFREE

03~10 WAY

RIGHT EMPTY 2

DESCRIPTION: