

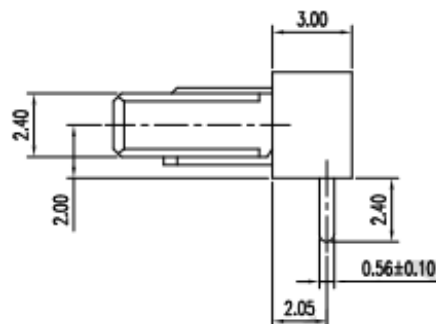
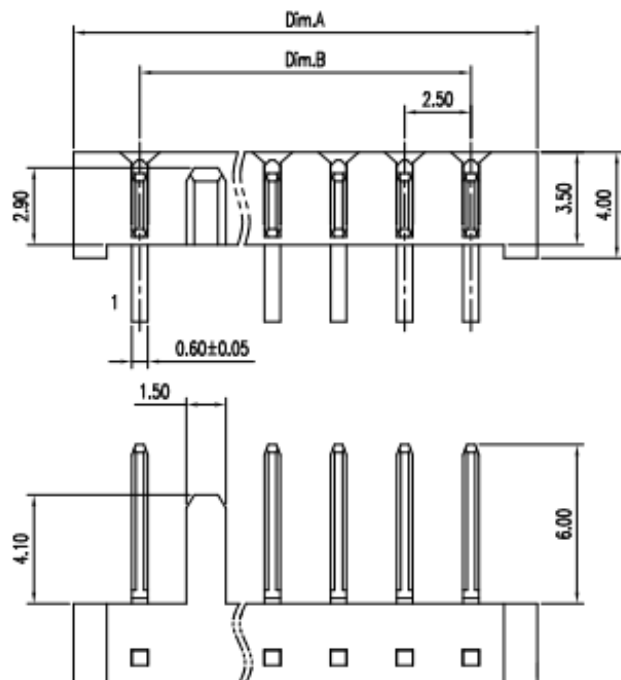


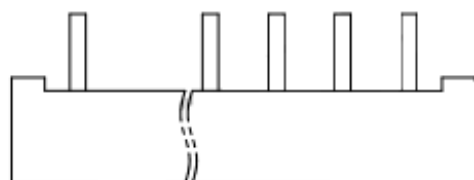



Notes:

1. Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Copper Alloy
2. Finish:
Terminal: Selected Gold on Contact Area,
G/F on Solder Tails, Both over
Nickel Under-plated Overall

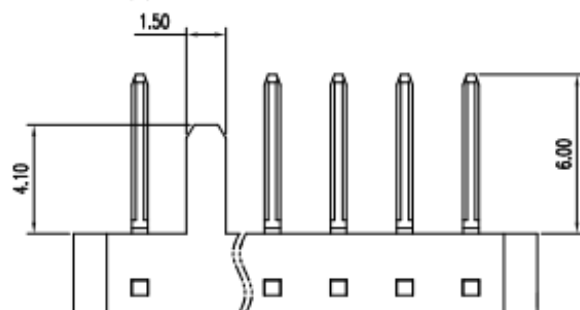

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
BCK25-PR30X60-03	3		12.50	7.50
BCK25-PR30X60-04	4		15.00	10.00
BCK25-PR30X60-05	5		17.50	12.50
BCK25-PR30X60-06	6		20.00	15.00
BCK25-PR30X60-07	7		22.50	17.50
BCK25-PR30X60-08	8		25.00	20.00
BCK25-PR30X60-09	9		27.50	22.50
BCK25-PR30X60-10	10		30.00	25.00

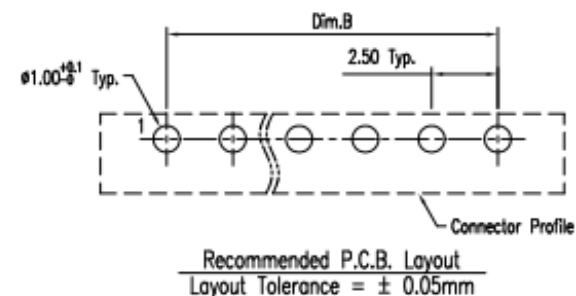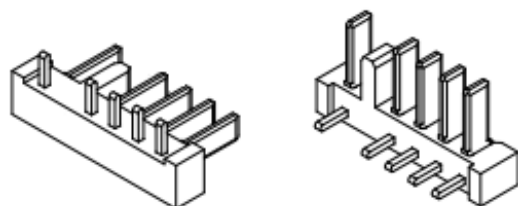

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

BCK25-PR30X60-xx-LF

SERIES
LEADFREE
03~10WAY
CONTACT 6.0mm
NON POST
HIGH 3.0mm
DIP 90°
MALE

DESCRIPTION: 2.5mm Pitch Battery conn Male Typt