

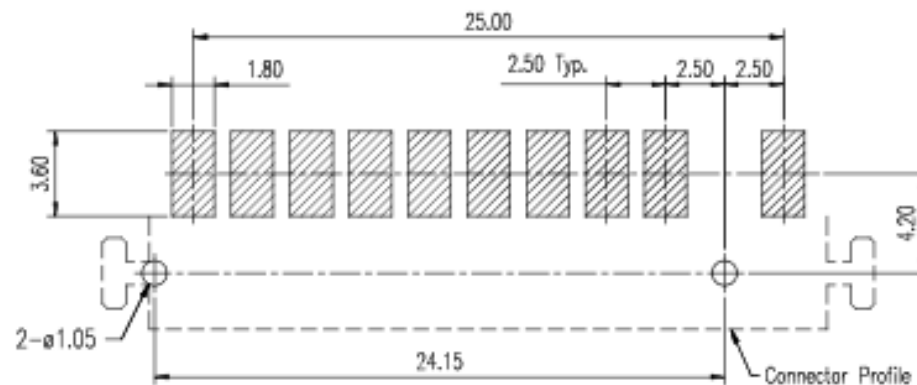
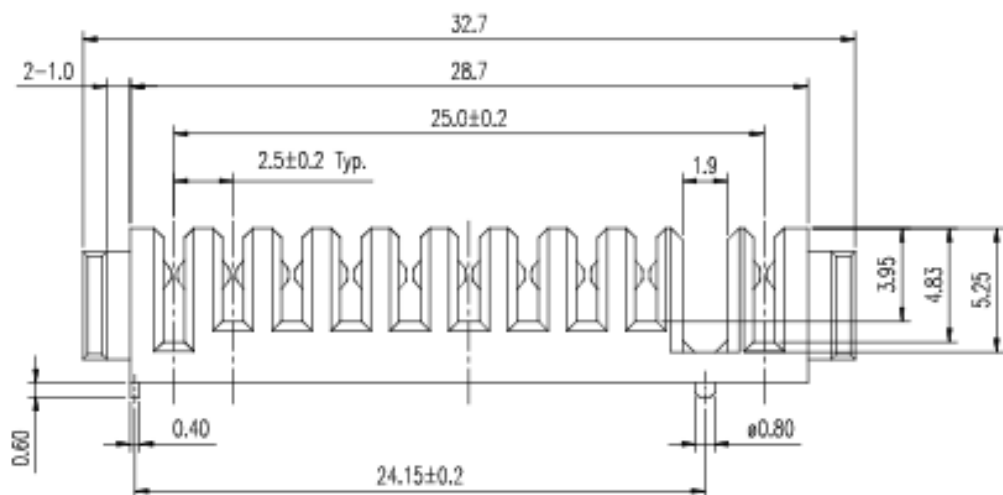
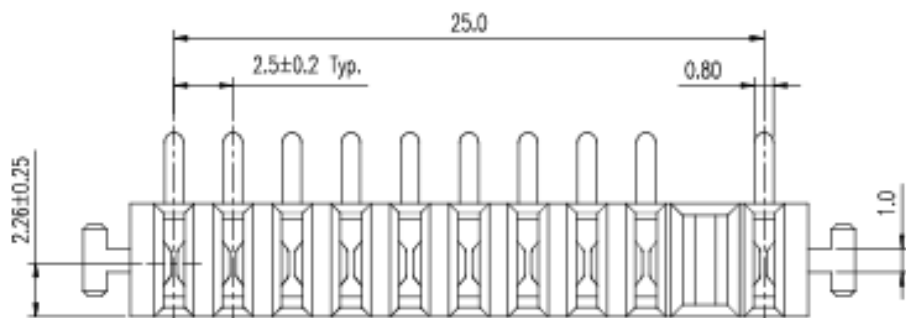


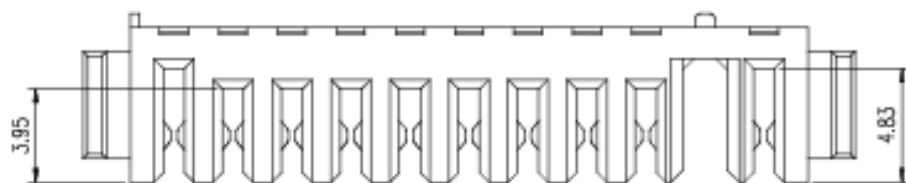

Recommended P.C.B. Layout
Layout Tolerance = $\pm 0.05\text{mm}$

Notes:

1. Material:
Housing: Thermoplastic UL 94V-0, Black
Terminal: Copper Alloy
2. Finish:
Terminal: Selected Gold on Contact Area,
Gold Flash on Solder Tails, Both over
50u" Min. Nickel Under-plated Overall

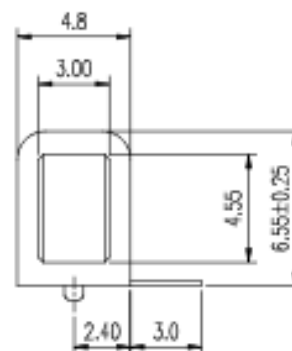

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X ± 0.38
XX ± 0.25
XXX ± 0.13
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCK25-SV65P-10-LF

SERIES LEADFREE
10 WAY
POST
HIGH 6.55mm
180°SMT
FEMALE

DESCRIPTION: 2.5mm Pitch Battery conn Female Typt