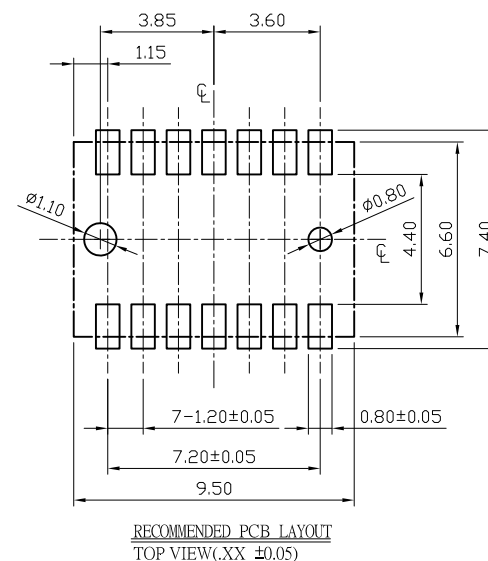
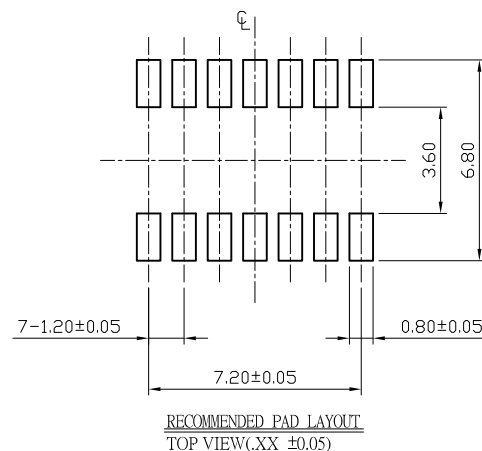

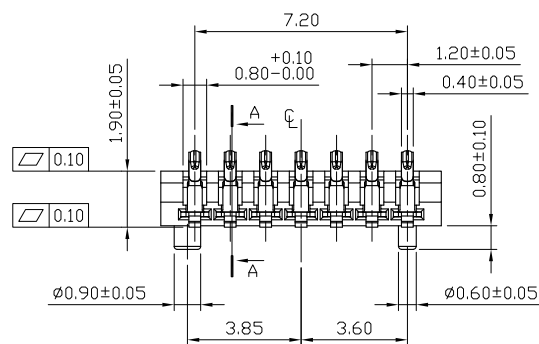
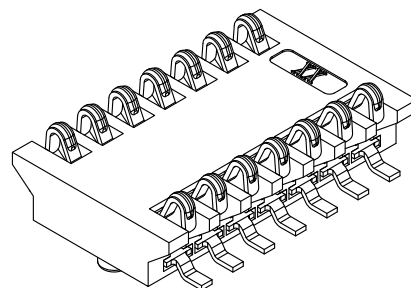
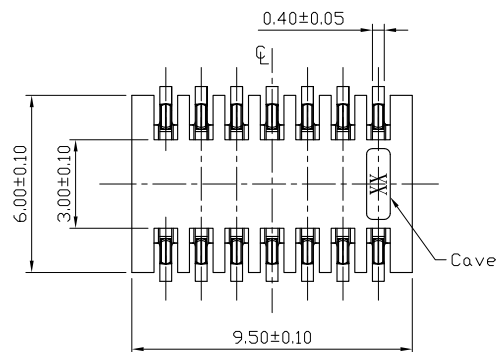


Material:

Housing: High temperature housing UL94V-0
withstands IR and VPR soldering methods.

Contacts: Phosphor Bronze.

Plating: Gold plated

Electrical Characteristics:

Voltage Rating: 50V.

Current Rating: 0.5 AMP.

Insulator Resistance: 500MΩ min.

Contact Resistance: 50mΩ max.

Durability: 5000 Cycles

Normal Force: 40~80gf AT The Working Position (2.10)

Operating Temperature: -20°C ~+85°C .

*RoHS Compliant

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS10-V19P-2X07-LF

SERIES POST 14 WAY LEADFREE
HIGH 1.9mm
180°SMT

DESCRIPTION: