
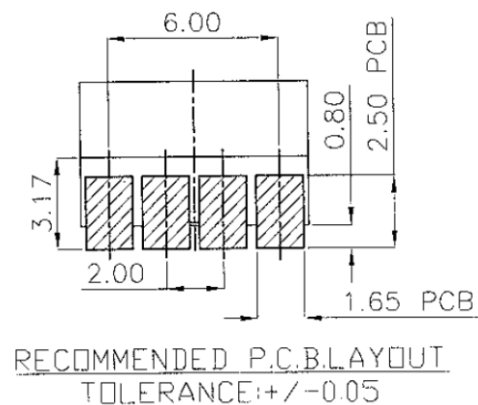


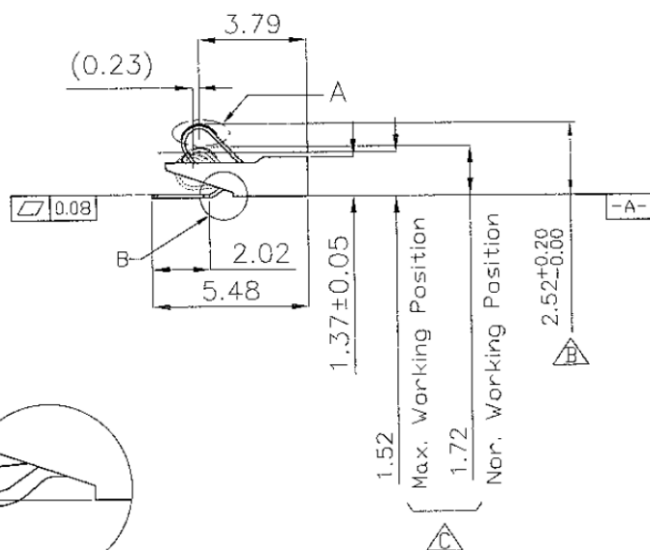
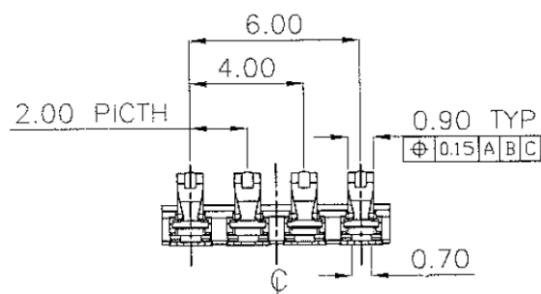



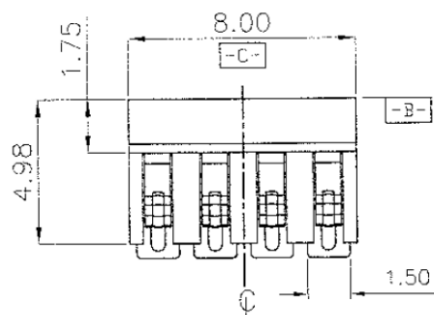

NOTES:

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMO PLASTIC
UL94V-0

CONTACT: COPPER ALLOY

2. FINISH:

TERMINAL:

CONTACT AREA: GOLD PL.

SOLDERING AREA: MATTE TIN PL.80u"~120u"

UNDER PL: NICKEL PL.50u"~100u"

3. NO BURR ALLOWED AT CONTACT SIDE

& ALL OTHER AREA 0.05MM MAX.

4. NORMAL FORCE: 220g MIN. @ 1.72MM. FROM PCB

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. $\pm$
X. ± 0.25
XX. ± 0.20
XXX. ± 0.10
ANG $\pm$

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

BCS20-V13XR-04-LF


SERIES | LEADFREE
04 WAY
REEL
180°SMT | NON POST
HIGH 1.37mm

DESCRIPTION: 4 PIN 2.00mm PITCH BATTERY CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

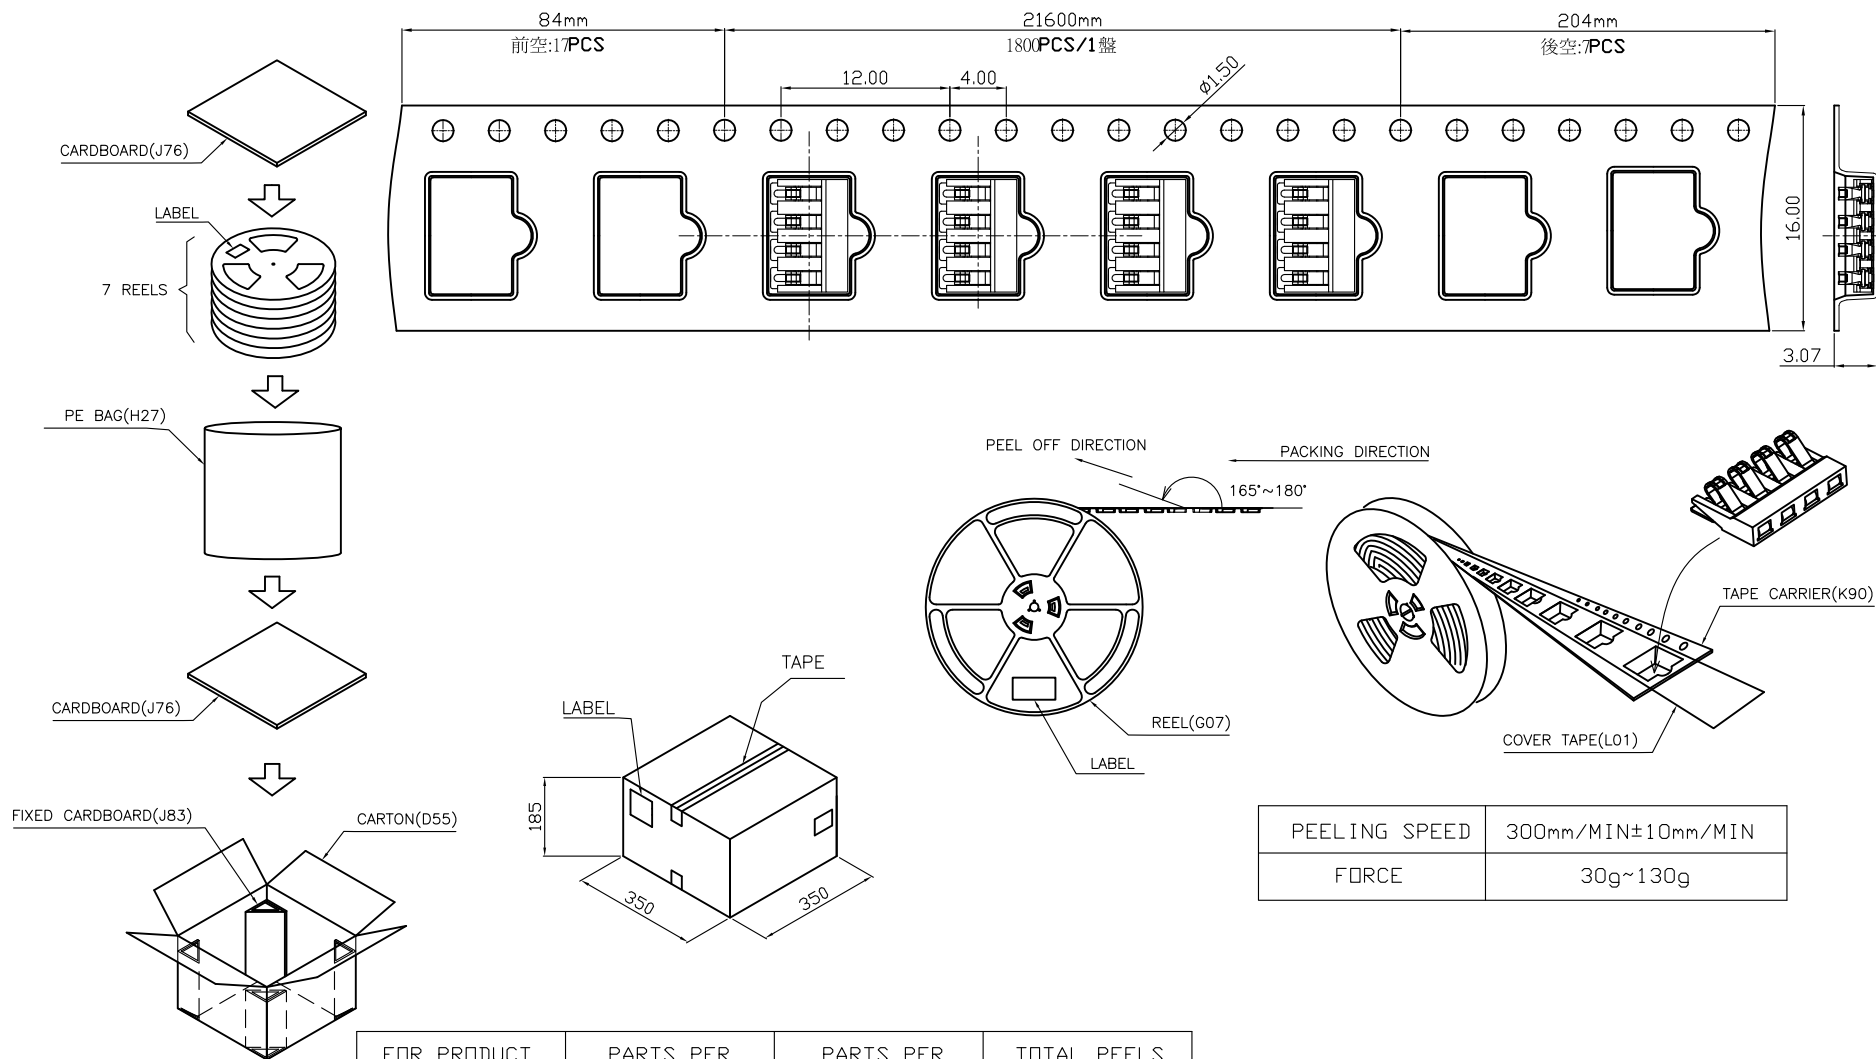

PEELING SPEED	300mm/MIN±10mm/MIN
FORCE	30g~130g

FOR PRODUCT PART NO	PARTS PER CARTON (S. P. Q)	PARTS PER PEEL	TOTAL PEELS PER CARTON
	12600	1800	7

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

BCS20-V13XR-04-LF
 SERIES | | | LEADFREE
 | | | 04 WAY
 | | | REEL
 180°SMT | | NON POST
 HIGH 1.37mm

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

X. ± 0.10

UNIT / mm

SCALE 1 : 1

.XX ± 0.05

DATE

.XXX ± 0.03

ANG ± 5°

SIZE A4

PPOJECTION

DESCRIPTION: