
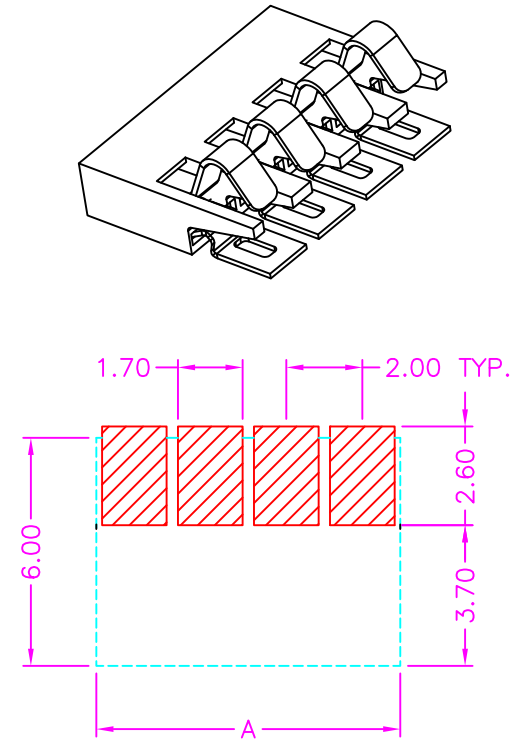
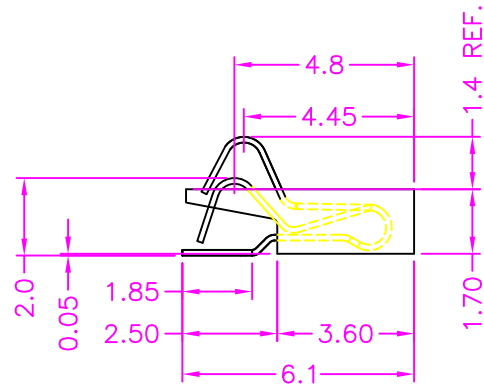


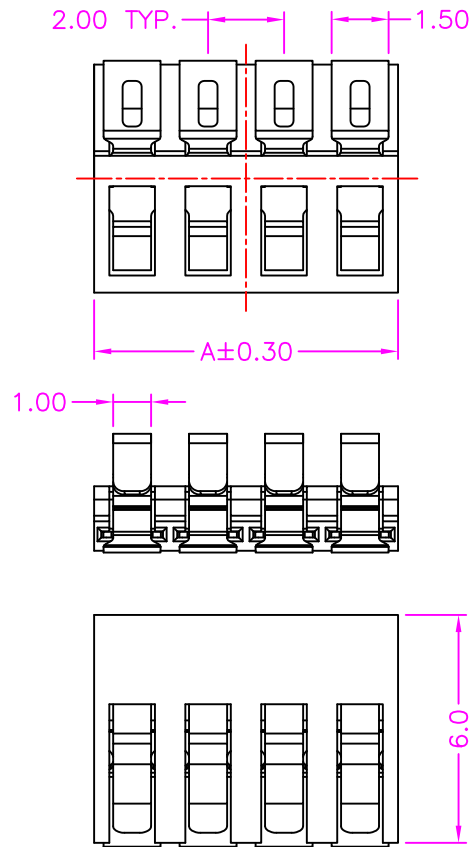

P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 2 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

TABLE

POS.	DIM A
02	4.0
03	6.0
04	8.0
05	10.0
06	12.0
07	14.0
08	16.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.40

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS20-V17X-xx-LF

SERIES

LEADFREE

02~08 WAY

NON POST

HIGH 1.7mm

180°SMT

DESCRIPTION: BATTERY, 2.00mm PITCH, PCB MOUNT, VERTICAL SMT, FEMALE