

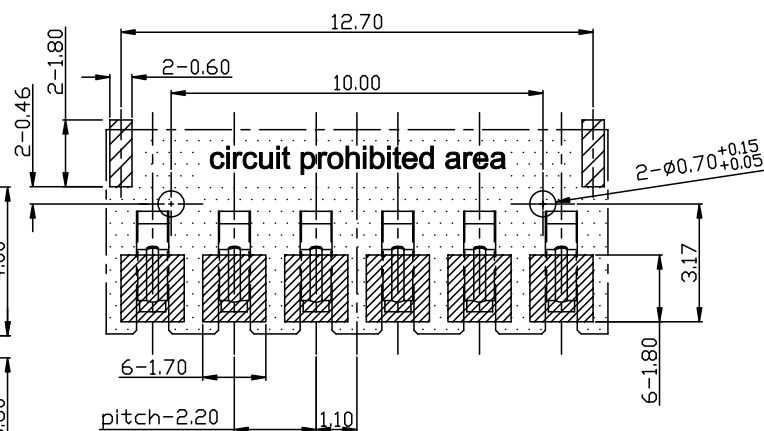
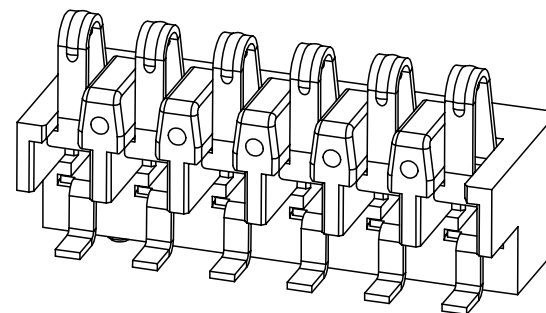
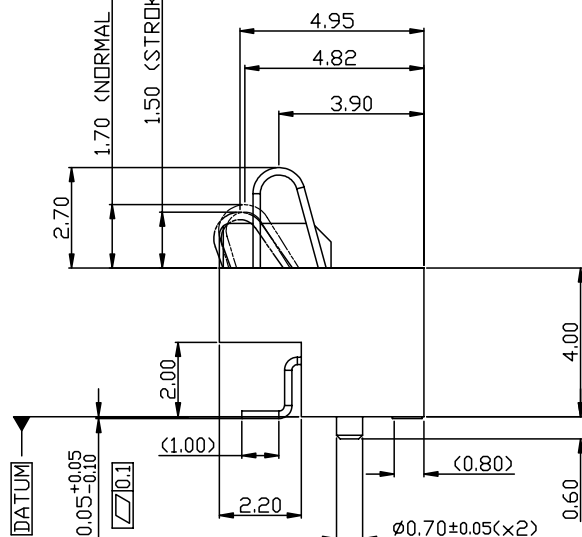
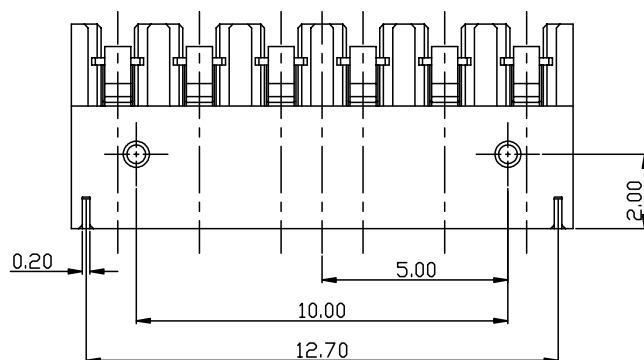


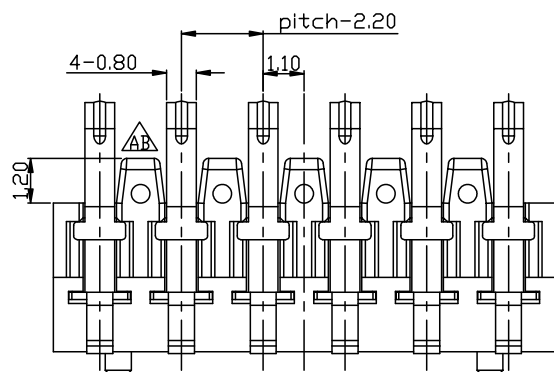

- ◆ Assembly
■ Function
● Control

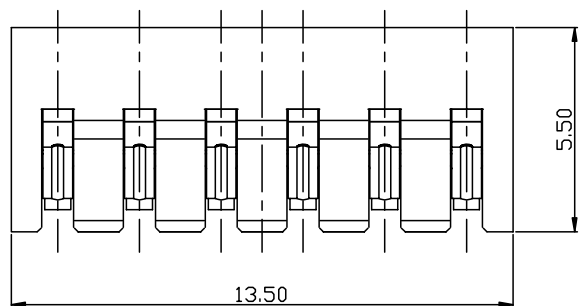

RECOMMENDED PCB LAYOUT
TOLERANCE : $\pm 0.05\text{mm}$

NOTE:

1.Material:

Housing: High-Temperature Nylon, UL94V-0, BLACK.

Contact: Copper alloy.

Plating: Ni Over all, Au (Contact area),
Au (Soldering area).

Soldering Pin: Copper alloy.

Plating: Ni, Sn Over all.

2. COPLANARITY SHOULD BE WITHIN 0.1mm.

BCS22-V40PR-06-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. BCS22-V40PR-06

DWG NO. BCS22-V40PR-06

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$ 0.15
.XX $\pm$ 0.10
.XXX $\pm$
ANG

DESCRIPTION:

6pin Battery Conn.
Pitch=2.2mm

AREA

REVISIONS



DATE

煜倫股份有限公司




- Assembly dim.
- Functionally dim.
- ◆ Control dim.

成品出料帶方向

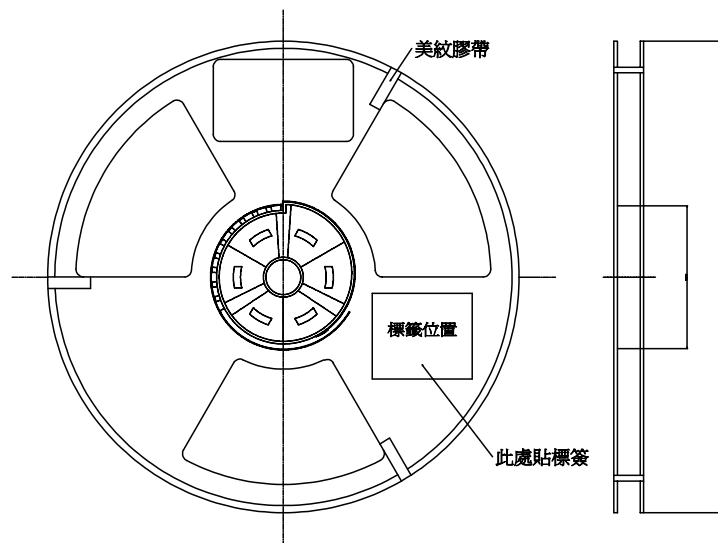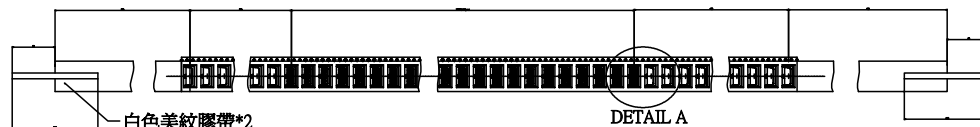

DETAIL A


Battery (空位)



DETAIL A

NOTES:


- 1. PACKING PREPARE LEADER AND EMPTY. DETAIL AS BELOW



TAIL(EMPTY) WITH CONNECTOR LEADER(EMPTY)

- 2. FORCE OF TEARING OFF TOP TAPE 15~80 gf


TEARING OFF IN THIS DIRECTION



PULL OUT IN THIS DIRECTION

- 3. EDGE OF ROLLING UP SHOULD BE ADHERED THE TOP COVER TAPE TO THE SIDE OF REL AN ADHENSIVE TAPE
- 4. TOP COVER TAPE SHOULD BE LIMITED IN AREA OF PLASTIC TAPE

- 5. PLASTIC REEL ---DIM A Ø330 DIM B Ø100
- 6. QUANTITY---PLASTIC REEL ABOUT 700 PCS
- 7. CARRIER TAPE COLOR : TRANSPARENT.



裝成品料帶方式

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. BCS22-V40PR-06

DWG NO. BCS22-V40PR-06

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG

DESCRIPTION:

6pin Battery Conn.
Pitch=2.2mm

AREA

REVISIONS

DATE

煜倫股份有限公司