

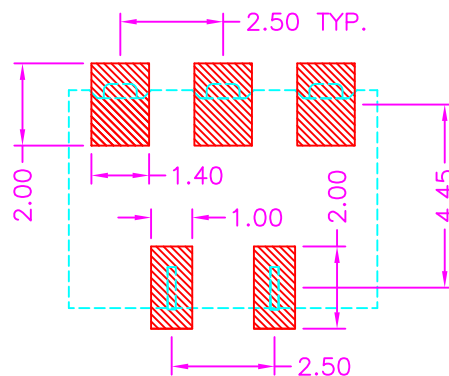
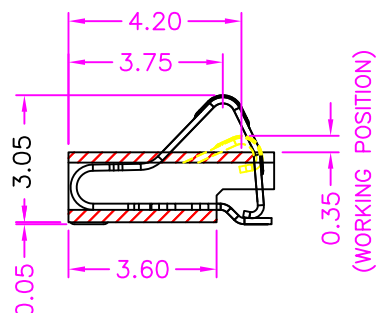


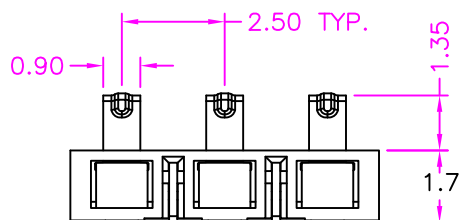


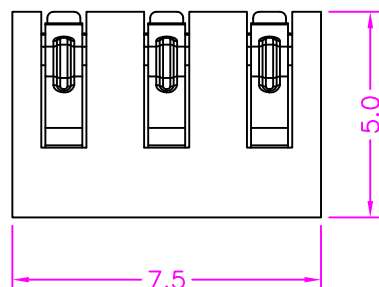

P.C.B. LAYOUT  
TOP VIEW  $\pm 0.05$

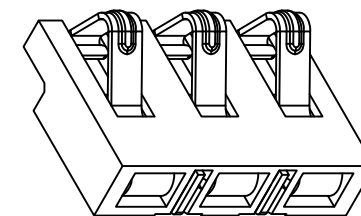

## MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
PAD: COPPER ALLOY, TIN PLATED  
TERMINAL: COPPER ALLOY, GOLD PLATED

## SPECIFICATION

CURRENT RATING: 2 AMP MAX  
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
CONTACT RESISTANCE: 50m OHMS MAX  
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
OPERATION TEMPERATURE:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm 0.40$

.X  $\pm 0.30$

.XX  $\pm 0.20$

.XXX  $\pm 0.10$

ANG  $\pm$

PPOJECTION

照片框

## ORDER INFORMATION

BCS25-V17E1-03-LF

SERIES | | | LEADFREE  
| | | 03 WAY  
| | | EAR  
| | | HIGH 1.7mm  
| | | 180°SMT

DESCRIPTION: BATTERY, 2.50mm PITCH, PCB MOUNT, VERTICAL SMT, WITH PAD