

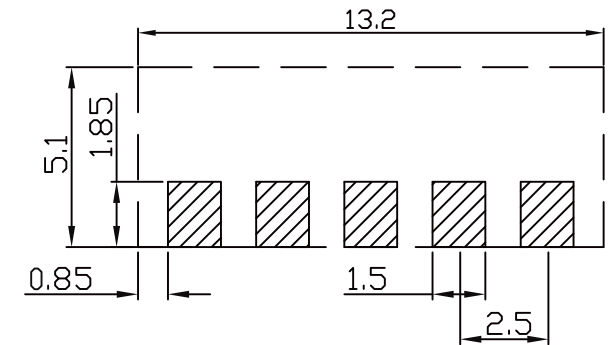

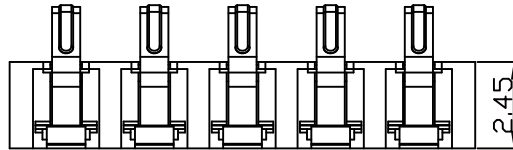

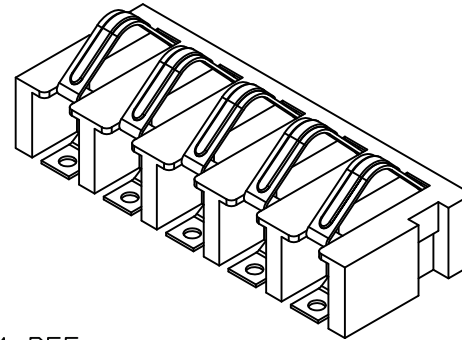
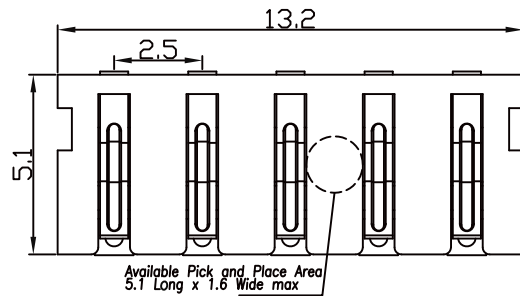


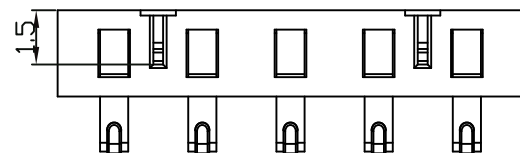

P.C.B. LAYOUT (TOP VIEW)

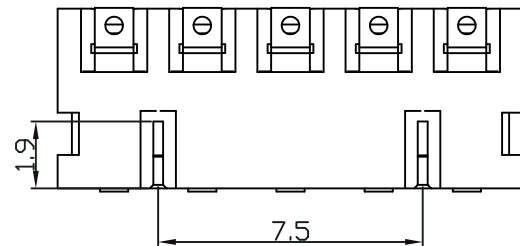

SPECIFICATIONS:

- 1.Contact Current Rating:2 Amperes/contact.
- 2.Dielectric Withstanding Voltage:250 VAC/1 Minute
- 3.Contact Resistance:30 Millohms Maximum.
- 4.Insulation Resistance:1000 Megaohms Minimum at 100V DC.
- 5.Operating Temperature:-40° to +125°C.
- 6.Material: Contact: Beryllium Copper Alloy, selective 30u" gold plating on contact area matt tin on solder area.
Housing: LCP.
- 7.Durability: 5000 Cycles.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-V24E0-05-LF

SERIES

LEADFREE

05 WAY

EAR

HIGH 2.45mm

180°SMT

DESCRIPTION: Battery Connector Pitch 2.5mm 5Pin Height 2.45mm none post