

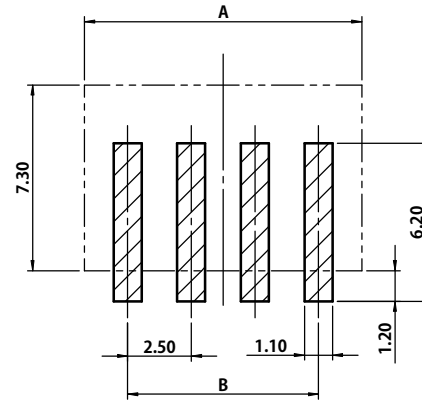



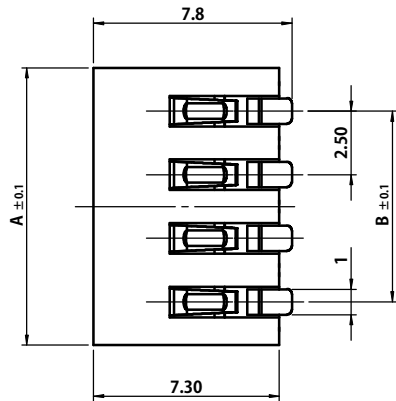

P.C.B LAYOUT



NOTE:
1. CONTACT: Au at Contact Area & Tin at Solder Area.

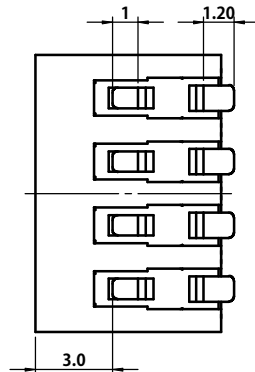
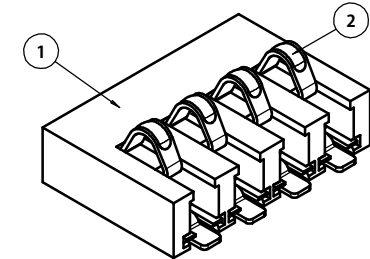


TABLE 1 2

NO.	Part Name	A	B
1	BCS25-V26X-03	8.4	5.0
2	BCS25-V26X-04	10.9	7.5
3	BCS25-V26X-05	13.4	10.0
4	BCS25-V26X-06	15.9	12.5

2	CONTACT	TABLE 1	COPPER ALLOY	Au&Tin Over Ni	
1	INSULATOR	1	High Temp. Thermoplastic	BLACK	UL94V-0
NO.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

BCS25-V26X-xx-LF

SERIES
LEADFREE
03~06 WAY
NON POST
HIGH 2.65mm
180°SMT

DESCRIPTION: