

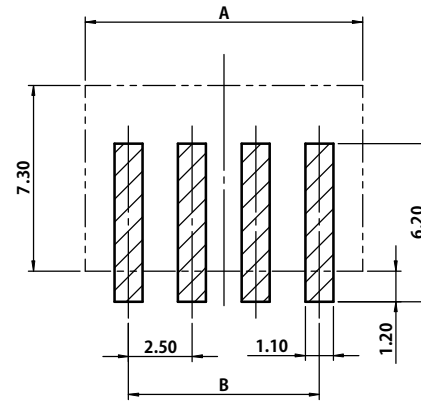



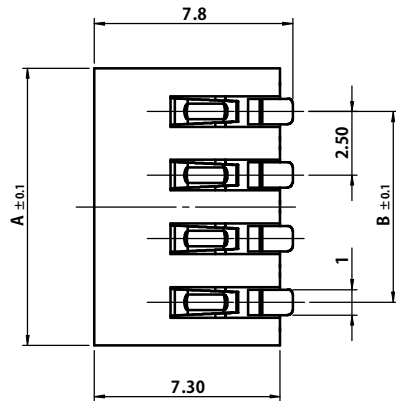

P.C.B LAYOUT



NOTE:

1. CONTACT: Au at Contact Area & Tin at Solder Area.

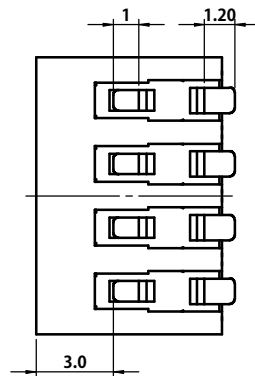
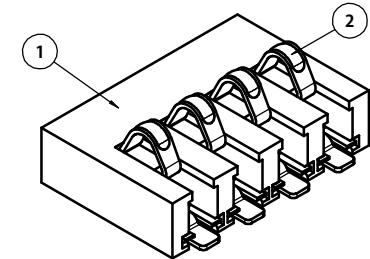


TABLE 1 2

3

NO.	Part Name	A	B
1	BCS25-V26X-03	8.4	5.0
2	BCS25-V26X-04	10.9	7.5
3	BCS25-V26X-05	13.4	10.0
4	BCS25-V26X-06	15.9	12.5

2	CONTACT	TABLE 1	COPPER ALLOY	Au&Tin Over Ni	
1	INSULATOR	1	High Temp. Thermoplastic	BLACK	UL94V-0
NO.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 3°

PPOJECTION


照片框

ORDER INFORMATION

BCS25-V26XR-xx-LF


SERIES 180°SMT
LEADFREE
03~06 WAY
REEL
NON POST
HIGH 2.65mm

DESCRIPTION:

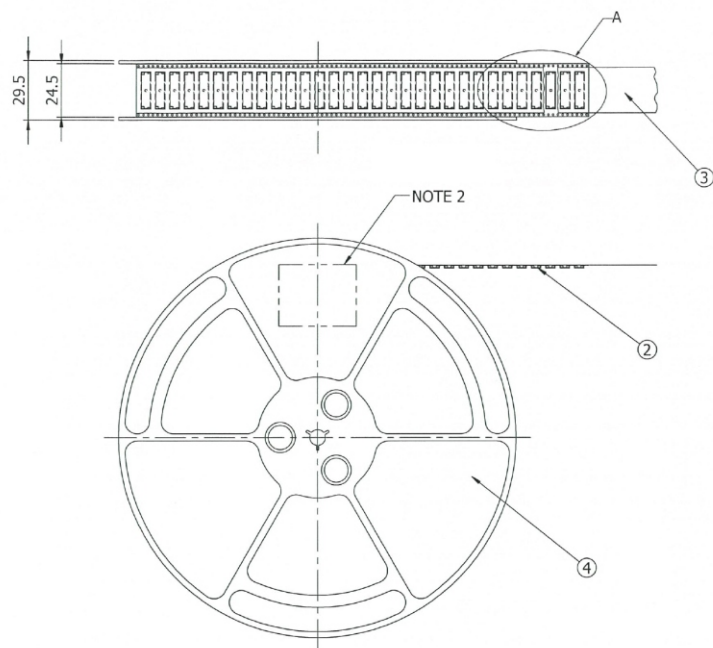


REEL
(SCALE 1:4)

(20PITCH MIN)

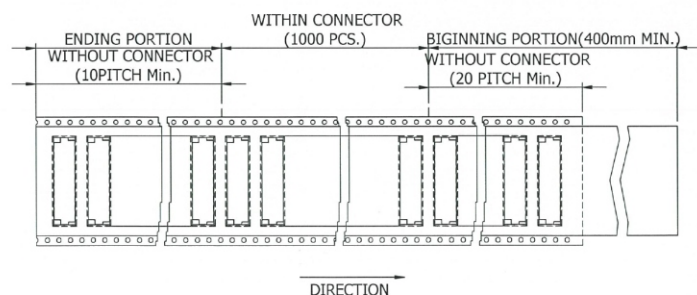

NOTE:

1. SUFFIX OF THE PART NUMBER INDICATES THAT 1000 PCS. OF CONNECTORS ARE ACCOMMODATED IN ONE REEL.
2. THE LABEL IS TO BE ATTACHED ON THE MAGAZINE AS SHOWN.
3. REFER. TO THE DRAWING, FOR THE DIMENSIONS OF THE CONNECTOR.
4. PLEASE LOOK AT TABLE1 WITH THE DIMENSION OF A, B, C...ETC.

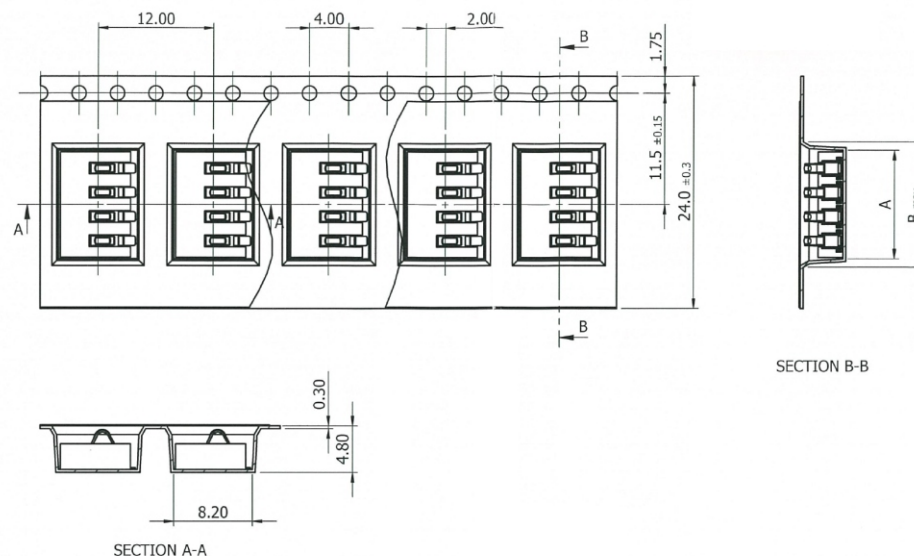

SECTION B-B

Table 1

3	BCS25-V26XR-06	16.20	18.00
2	BCS25-V26XR-05	13.70	15.50
1	BCS25-V26XR-04	11.20	13.00
NO.	Part Name	A	B

4	REEL	1	—	—
3	COVER-TAPE	—	PET	—
2	CARRIER-TAPE	—	PS	—
1	CONNECTOR	1000	—	—
NO.	DESCRIPTION	QUANTITY	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

BCS25-V26XR-xx-LF

SERIES | | | | LEADFREE
180°SMT | | | | 03~06 WAY
NON POST
HIGH 2.65mm

DESCRIPTION: