

Specifications:

Current Rating:1.0A AC,DC

Voltage Rating:250V AC,DC

Contact Resistance:30m ohm Max

Withstanding Resistance:1000M ohm

Withstanding Voltage:500V AC/Minute

Temperature Range : -25° ~ +125°



Material:

Contact Material:Copper Alloy


Plastic Material:High Temp Plastic UL94V-0

Plastic Color:Black

Finish:Gold Plated

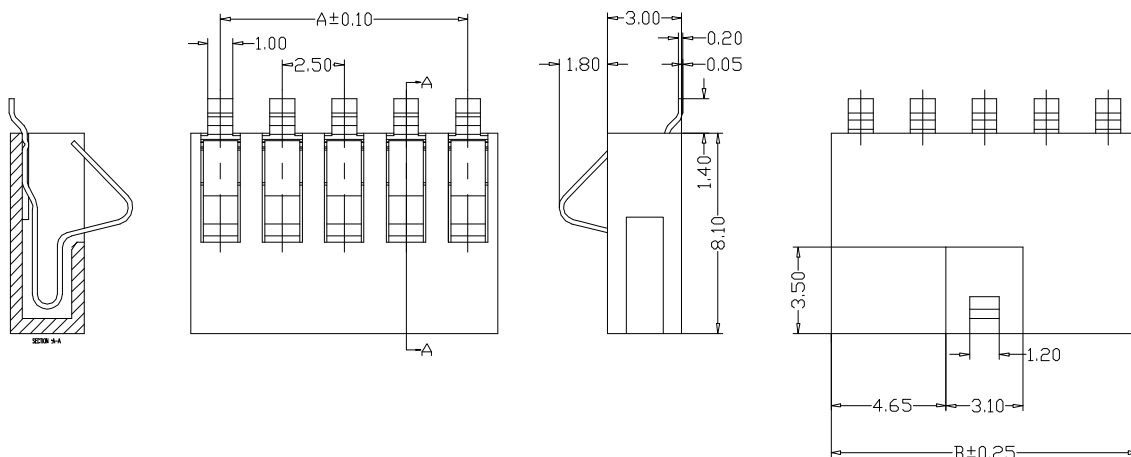

Pin No.	A	B
BCS25-V30X-02	2.50	4.90
BCS25-V30X-03	5.00	7.40
BCS25-V30X-04	7.50	9.90
BCS25-V30X-05	10.00	12.40

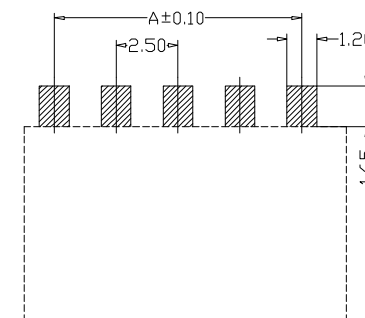

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BCS25-V30X-xx-LF

SERIES

LEADFREE

02-05WAY

NON POST

HIGH 3.0mm

180°SMT

DESCRIPTION: