


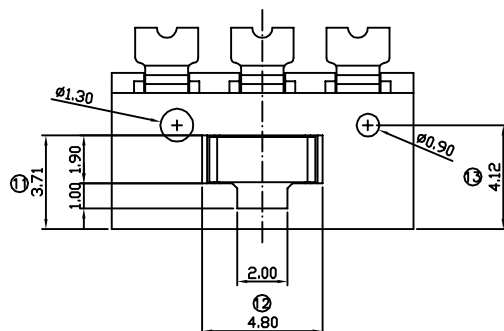
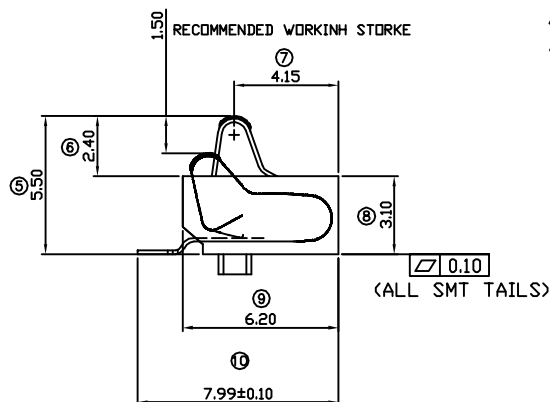


NOTE:

- 1.MATERIAL:
HOUSING: HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
CONTACT: Beryllium copper,T=0.15 (C1720 1/2H)
TAB: Phosphor bronze,T=0.15 (C5191 H)
- 2.FINISH:
CONTACT:
3u" MIN GOLD PLATING ON CONTACT AREA;
1u" MIN GOLD PLATING ON SOLDER TAILS;
40~80u" NICKEL UNDERPLATING OVERALL.
- TAB:
100u" MIN MATTE TIN PLATING ALL OVER
20u" MIN NICKEL UNDERPLATING OVER ALL.
- 3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5SEC.
- 4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

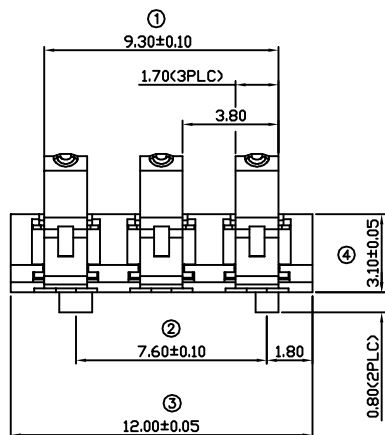

Bottom

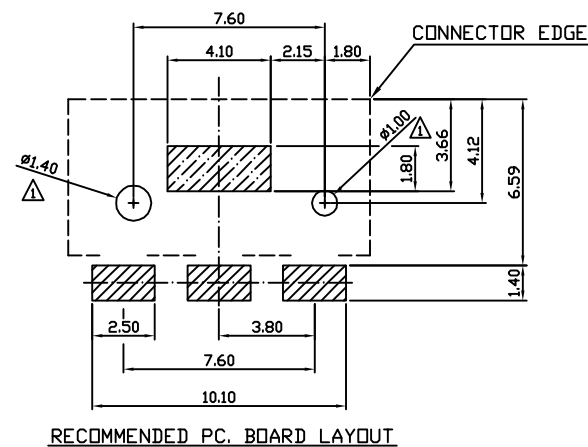

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-V31EP2-03-LF

SERIES

LEADFREE

03 WAY

EAR+POST

HIGH 3.1mm

180°SMT

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com