
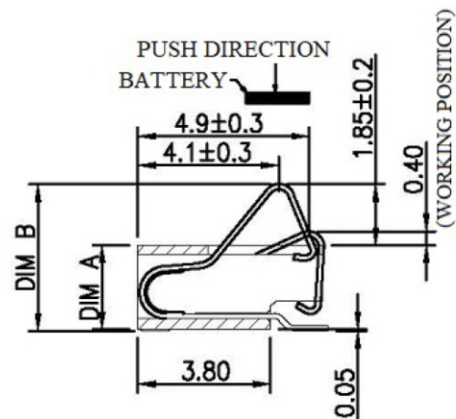
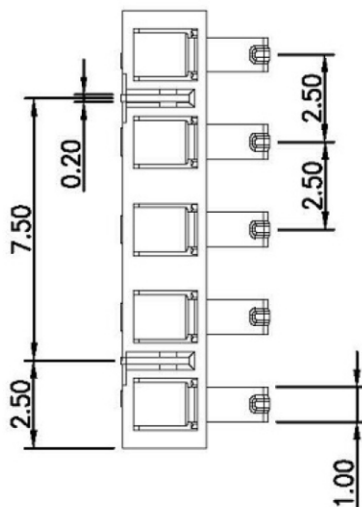


主要技术规格:


1. 额定值: 2A 12V
2. 接触电阻: 30mΩ
3. 使用温度: -40℃~+85℃
4. 绝缘电阻: 500MΩ
5. 抗电强度: 500V 50HZ 1Min.
6. 寿命: 5000Cycles

材料:

- 1: 塑胶: LCP
- 2: 接触点: 磷铜, 触点镀金3U

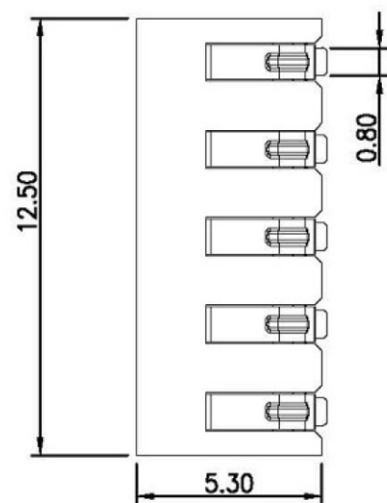

PART NO.	DIM A	DIM B
BCS25-V24E1-05	2.4	4.30±0.2
BCS25-V30E1-05	3.0	4.90±0.2
BCS25-V35E1-05	3.5	5.40±0.2

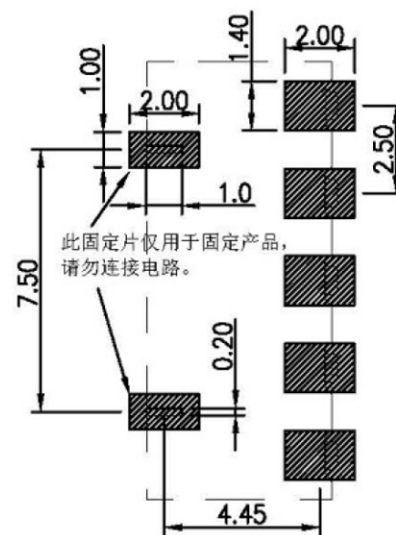

RECOMMENDED PCB LAYOUT

TOP VIEW (.XX±0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-VxxE1-05-LF

SERIES

LEADFREE

05 WAY

EAR

180°SMT

24:HIGH 2.4mm

30:HIGH 3.0mm

35:HIGH 3.5mm

DESCRIPTION: 2.50mm 電池座180 SMT 高=2.4mm 無柱 5P