
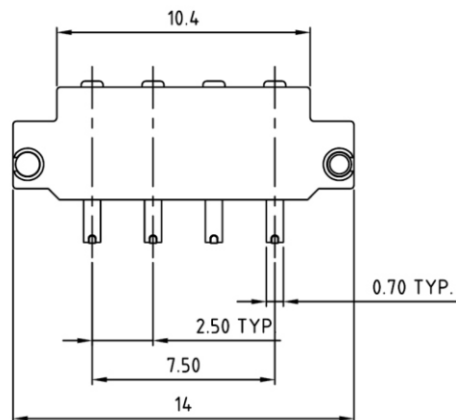
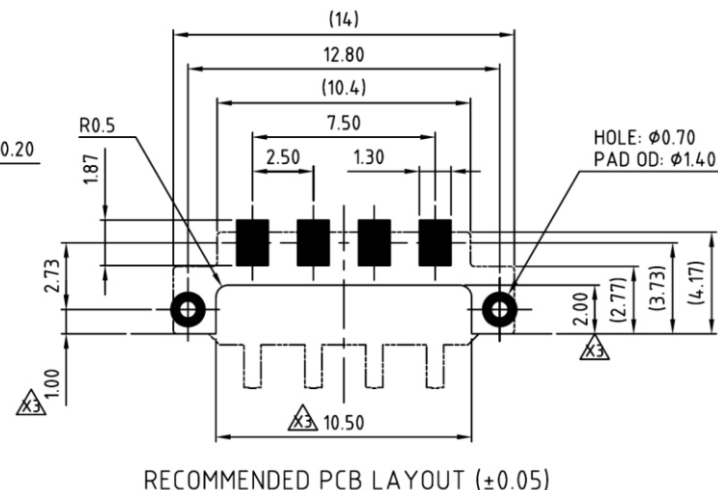


ITEM	DESCRIPTION	Q'TY
1	HOUSING, BLACK, UL94 V-0	1
2	CONTACT, G/F ON TAIL, 10u" GOLD ON CONTAT AREA	4
3	MOUNTING POST, 100u" TIN OVER NICKEL	2

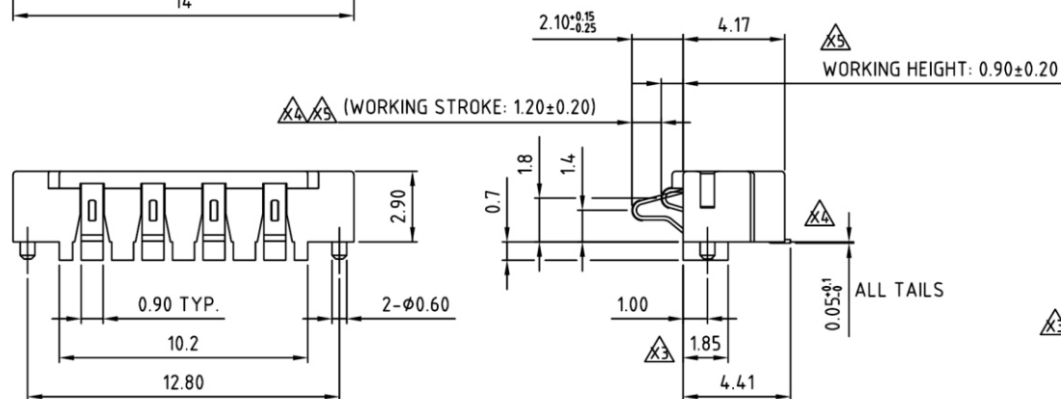

NOTES:

HOUSING: HIGH TEMP THERMOPLASTIC, UL94 V-0 RATED, BLACK

CONTACT: COPPER ALLOY

CONTACT FINISH: FLASH GOLD, ESPECIALLY 10u" GOLD ON CONTACT AREA

ALL OVER 30u" NICKEL UNDER-PLATED

MOUNTING POST: COPPER ALLOY, 100u" TIN OVER 50u" NICKEL UNDER-PLATED

CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM

INSULATION RESISTANCE: 1000 M OHMS MINIMUM

VOLTAGE RATING: 300 VAC

CURRENT RATING: 2.0 A

TAILS COPLANARITY (FOR SMT PROCESS): 0.12mm MAXIMUM

DURABILITY: 4000 CYCLES MINIMUM

CONTACT FORCE: 100 GRAMS MINIMUM AT SPECIFIED WORKING HEIGHT (0.90 ± 0.20 FORM HSG).

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

BCS25-W29P-04-LF

SERIES LEADFREE
04 WAY
POST
HIGH 2.9mm
90°SMT

DESCRIPTION: