


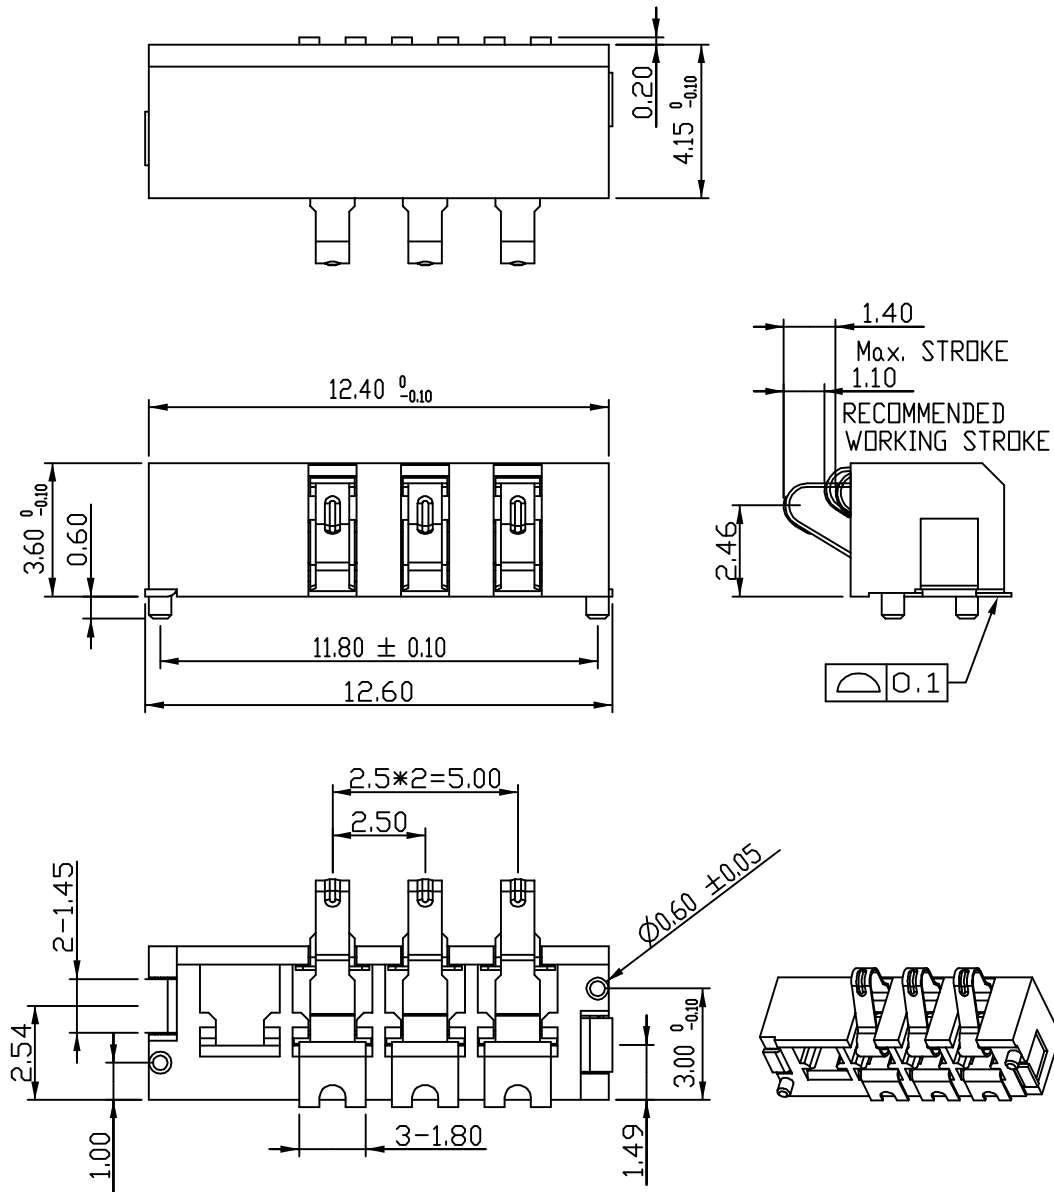

NOTE :

1.MATERIAL:

HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK

CONTACT: COPPER ALLOY,T=0.10

TAB: COPPER ALLOY,T=0.20

2.FINISH:

CONTACT:

>10u" GOLD PLATING ON CONTACT AREA;

>1u" GOLD PLATING ON SOLDER TAILS;


NICKEL UNDERPLATING OVER ALL.

TAB:

MATTE TIN OVER ALL.

3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.

4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

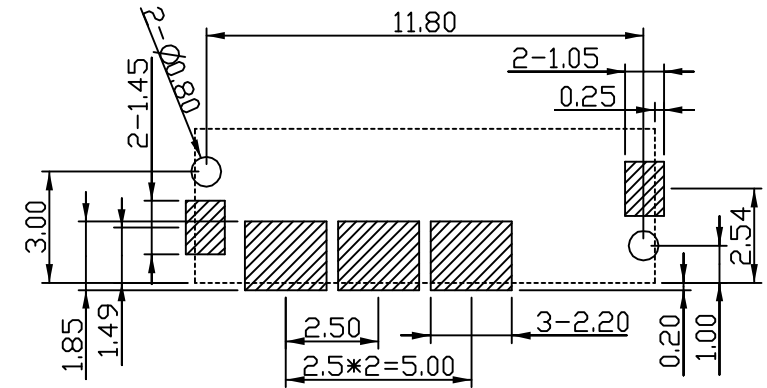

RECOMMENDED PC. BOARD LAYOUT

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.05

ANG ± 1°

SIZE A4

PPOJECTION

ORDER INFORMATION

BCS25-W36EP1-03-LF

SERIES
LEADFREE
03 WAY
POST
EAR
HIGH 3.6mm
90°SMT

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com