
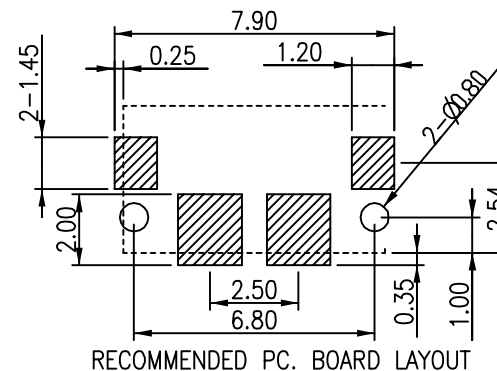

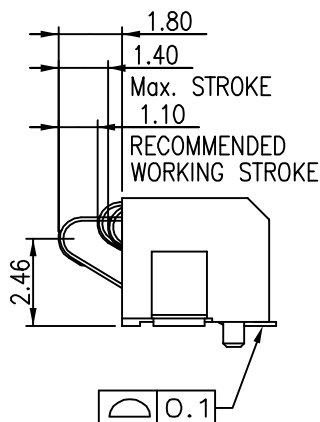
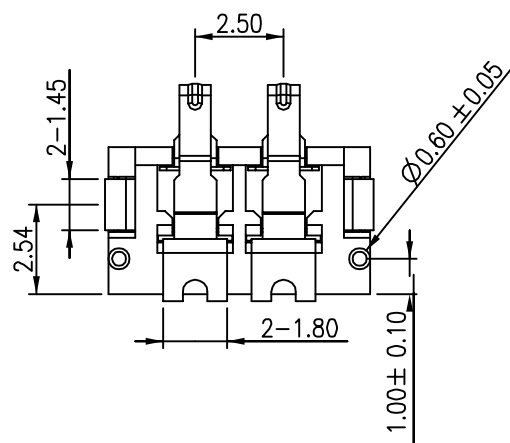
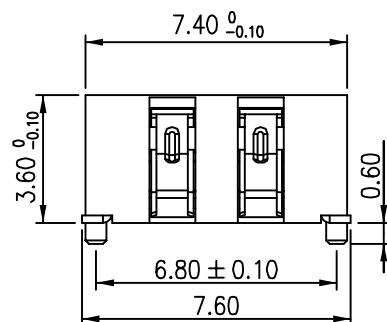


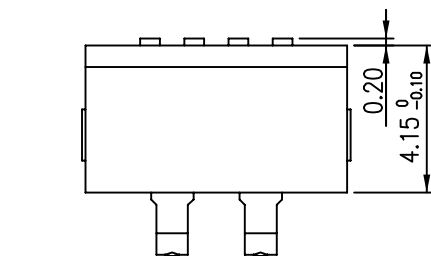

- NOTE :
- 1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
CONTACT:COPPER ALLOY,T=0.10
TAB:COPPER ALLOY,T=0.20
 - 2.FINISH:
CONTACT:
>X_u" GOLD PLATING ON CONTACT AREA;
>X_u" GOLD PLATING ON SOLDER TAILS;
NICKEL UNDERPLATING OVER ALL.
TAB:
MATTE TIN OVER ALL.
 - 3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.
 - 4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

BCS25-W36EP2-02-LF

SERIES POST EAR HIGH 3.60mm 90°SMT LEADFREE 02 WAY

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°