
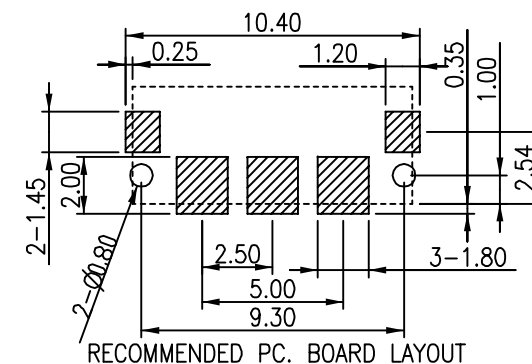

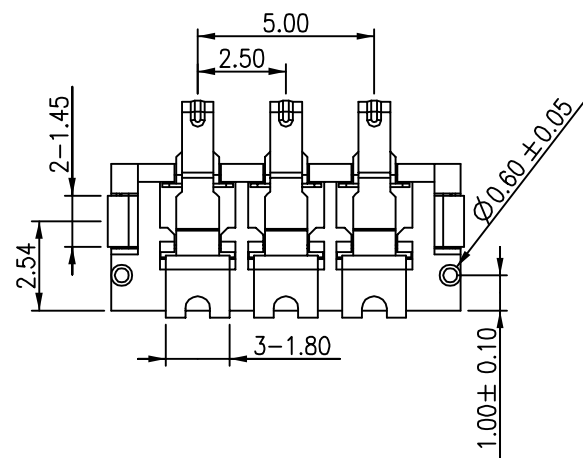
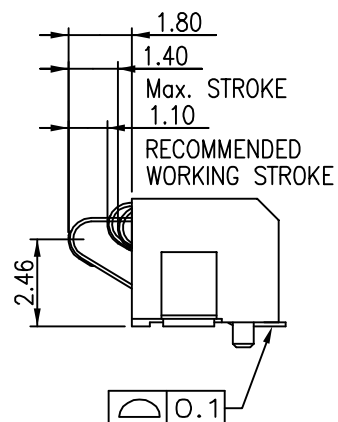
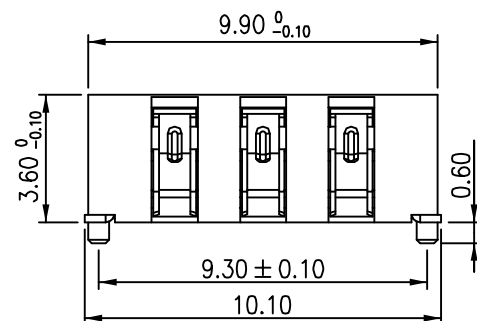


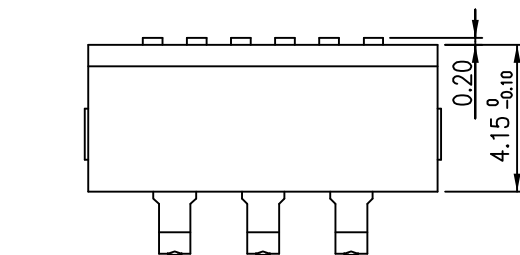

- NOTE :
- 1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
CONTACT:COPPER ALLOY,T=0.10
TAB:COPPER ALLOY,T=0.20
 - 2.FINISH:
CONTACT:
>XU" GOLD PLATING ON CONTACT AREA;
>XU" GOLD PLATING ON SOLDER TAILS;
NICKEL UNDERPLATING OVER ALL.
TAB:
MATTE TIN OVER ALL
 - 3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.
 - 4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W36EP2-03-LF

SERIES

LEADFREE
03 WAY
EAR+POST
HIGH 3.6mm
90°SMT

DESCRIPTION: