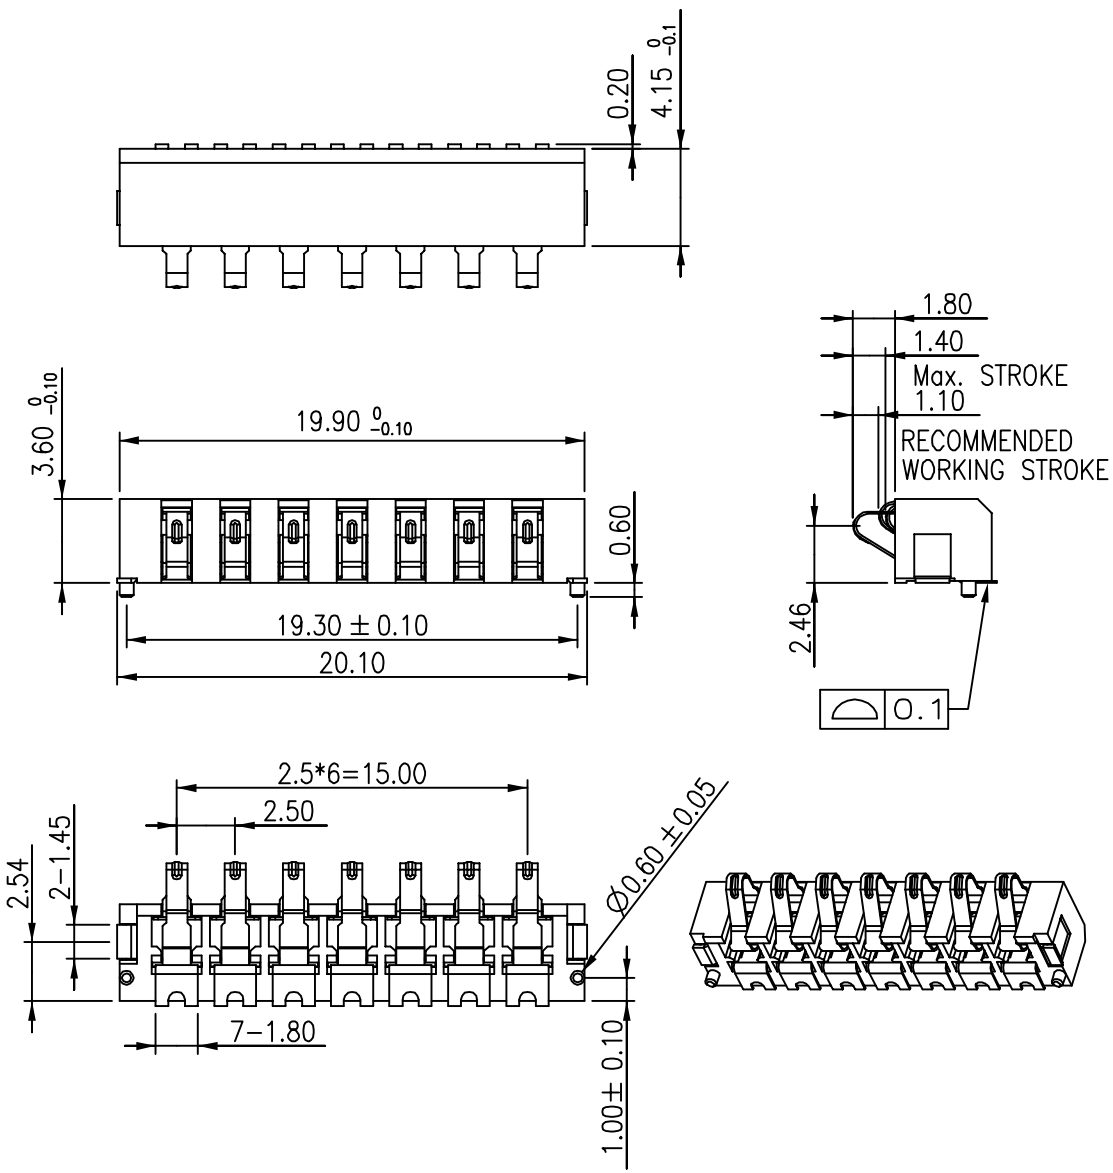

NOTE :
1.MATERIAL:
HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK
CONTACT:COPPER ALLOY,T=0.10
TAB:COPPER ALLOY,T=0.20
2.FINISH:
CONTACT:
SEE NOTE 5;
>1u" GOLD PLATING ON SOLDER TAILS;
NICKEL UNDERPLATING OVER ALL.
TAB:
MATTE TIN OVER ALL
3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.
4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

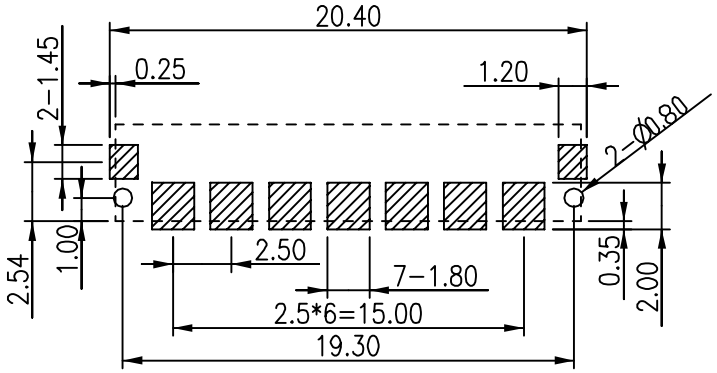

RECOMMENDED PC. BOARD LAYOUT

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.25
DATE		.XX ± 0.15
		.XXX ± 0.05
		ANG ± 1°
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

BCS25-W36EP2-07-LF

SERIES
90°SMT
HIGH 3.60mm
EAR
POST
07 WAY
LEADFREE

DESCRIPTION: