



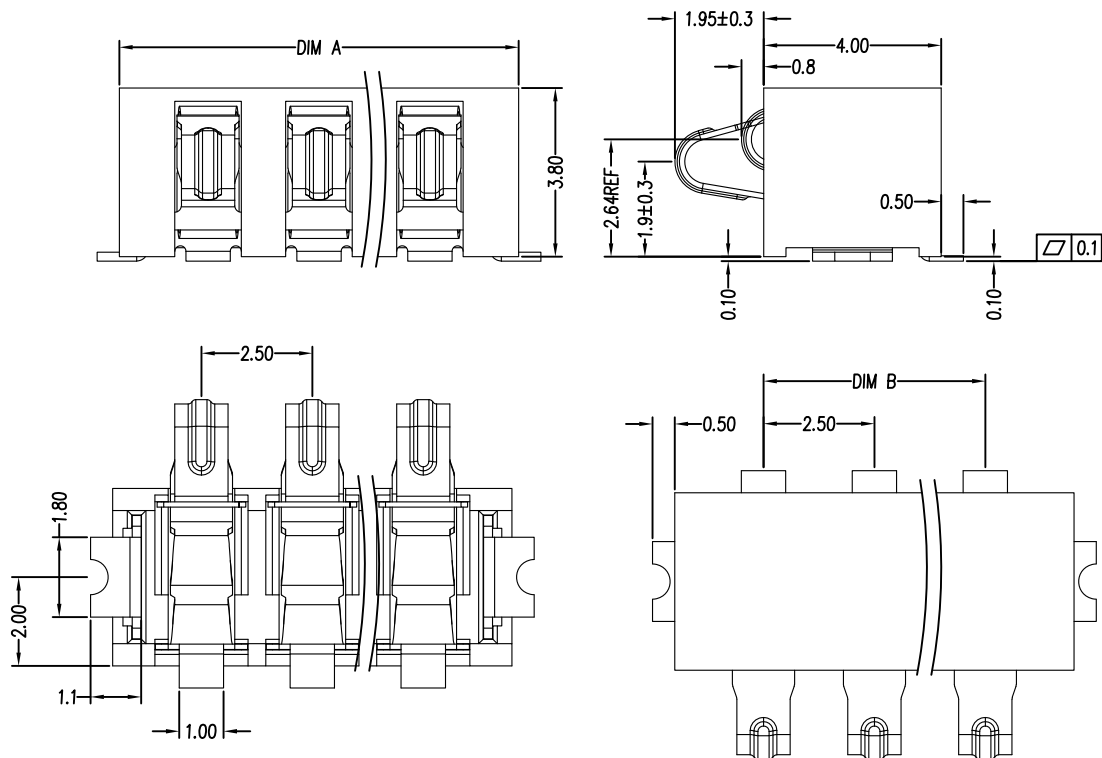

RECOMMENDED PCB LAYOUT
TOL: (±0.05)

PART NO.	DIM A	DIM B
BCS25-W38E1-02	6.5	2.5
BCS25-W38E1-03	9.0	5.0
BCS25-W38E1-04	11.5	7.5
BCS25-W38E1-05	14.0	10.0
BCS25-W38E1-06	16.5	12.5

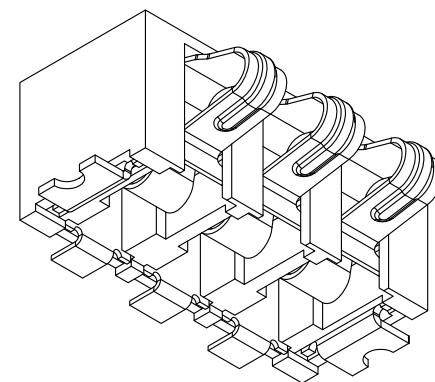

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩMAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜镀金

使用寿命: 3000次以上

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W38E1-xx-LF

SERIES
LEADFREE
02-06 WAY
EAR
HIGH 3.8mm
90°SMT

DESCRIPTION: 2.5PH侧压电池座-无柱