



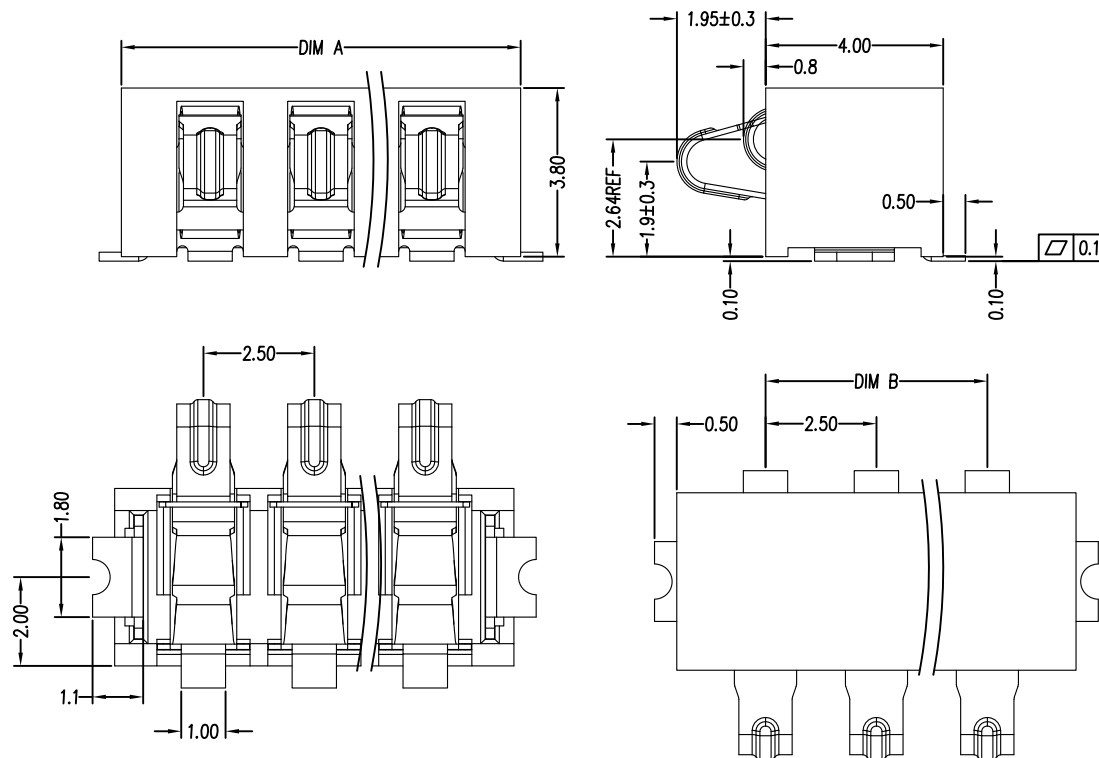

RECOMMENDED PCB LAYOUT
TOL: (±0.05)

PART NO.	DIM A	DIM B
BCS25-W38E1R-02	6.5	2.5
BCS25-W38E1R-03	9.0	5.0
BCS25-W38E1R-04	11.5	7.5
BCS25-W38E1R-05	14.0	10.0
BCS25-W38E1R-06	16.5	12.5

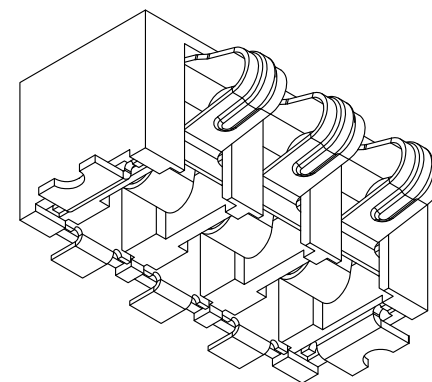

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩMAX

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜镀金

使用寿命: 3000次以上

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION


照片框

ORDER INFORMATION

BCS25-W38E1R-xx-LF

SERIES
LEADFREE
02-06 WAY
REEL
EAR
HIGH 3.8mm
90°SMT

DESCRIPTION: 2.5PH侧压电池座-无柱

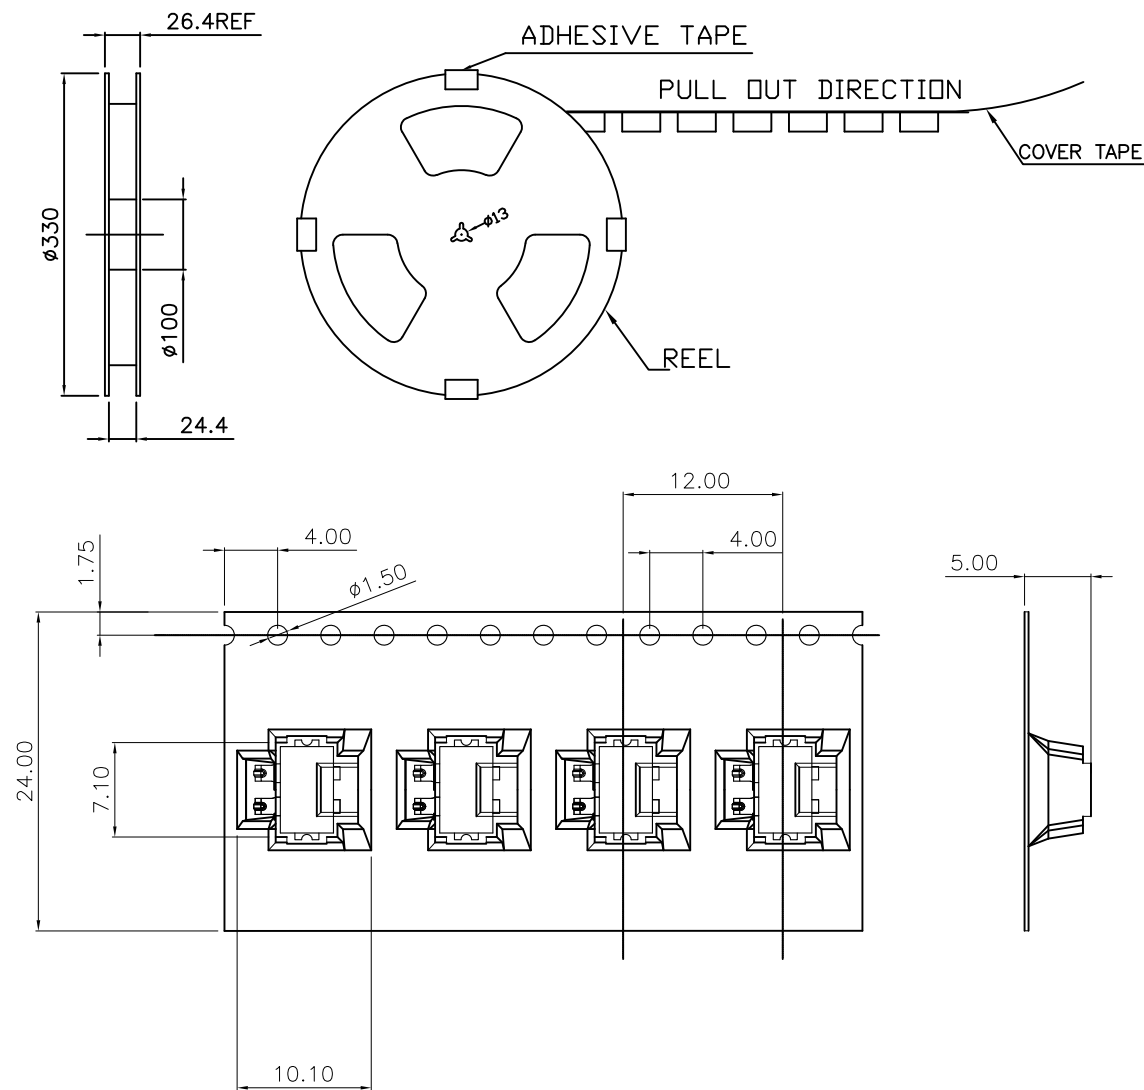

PULL OUT DIRECTION		
150~300		150~300
TAIL PART (EMPTY)	COMPONENT SUPPLIER	LEADER PART (EMPTY)

NOTE:

- CARRY TAPE前部分与尾部分各留出150~300mm长度不装产品
- 每穴放置1PCS产品，放置方式如图所示
- 包装机包好后再缠上一圈电周波，在REEL的四个等分点上贴胶带，以防止REEL张开；每REEL贴1PCS标签
- 包装数量：1000PCS/REEL，10REEL/CARTON，共10000PCS/CARTON
- 先在纸箱底部垫上1PCS硬纸板，四角垫上三角垫，然后把装好产品的REEL放进纸箱中，依次把10REEL产品放到纸箱中，最后用胶带封箱
- COVER TAPE与CARRY TAPE剥离力：0.1N~0.7N（跳动量在0.3N内）；剥离角度：165°~175°；剥离速度：250~300mm/min
- 包装方式：自粘式

项目	品 名	规 格	数量
①	2PIN BATTERY SMT	2PIN BATTERY SMT	10000PCS
②	REEL	D=330mm, d=100mm, H=24.4mm	10PCS
③	COVER TAPE	W=21.3mm, T=0.05mm	12480mm
④	CARRY TAPE	W=24mm, P=12, T=0.4mm	12480mm
⑤	硬纸板	330mm*330mm*3mm	1PCS
⑥	三角垫	150mm*133mm*67mm (T=3mm)	4PCS
⑦	纸箱	340mm*340mm*320mm	1PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION


照片框

ORDER INFORMATION

BCS25-W38E1R-xx-LF

SERIES
LEADFREE
02-06 WAY
REEL
EAR
HIGH 3.8mm
90°SMT

DESCRIPTION: 2.5PH侧压电池座-无柱

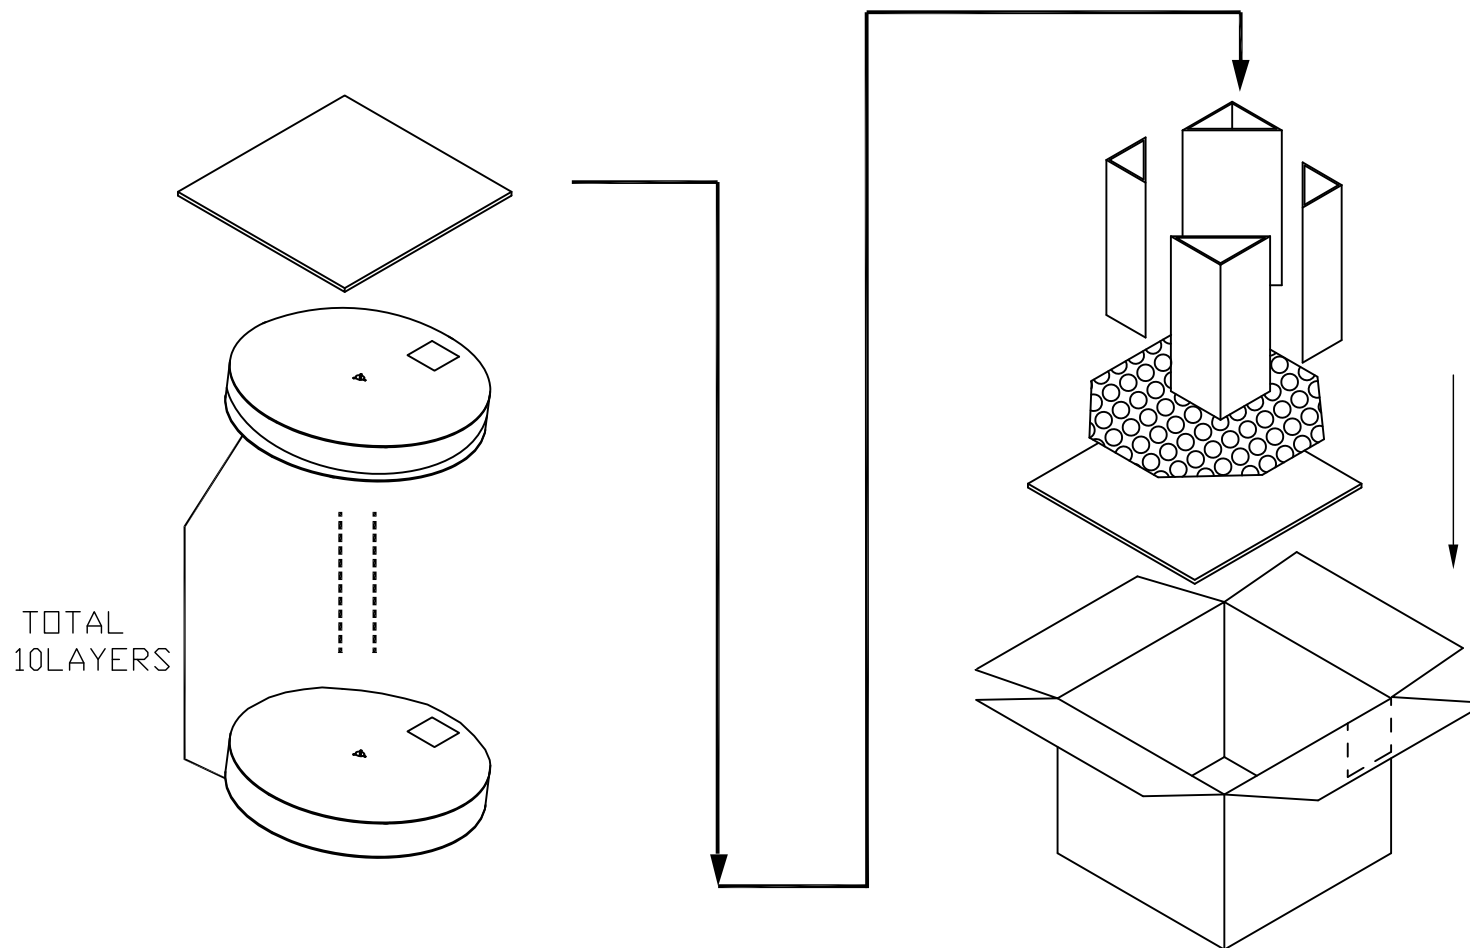

TOTAL
10 LAYERS

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

BCS25-W38E1R-xx-LF

SERIES

LEADFREE

02-06 WAY

REEL

EAR

HIGH 3.8mm

90°SMT

DESCRIPTION: 2.5PH侧压电池座-无柱