

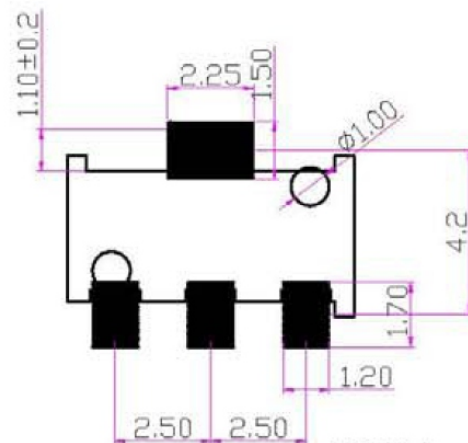
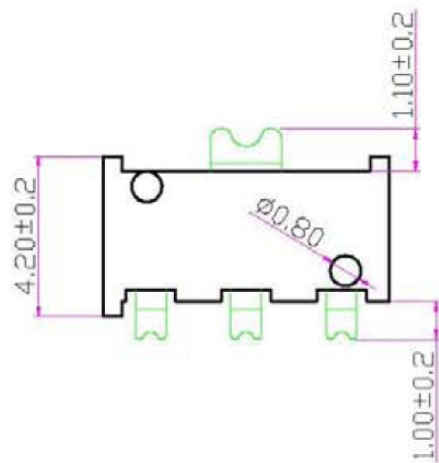


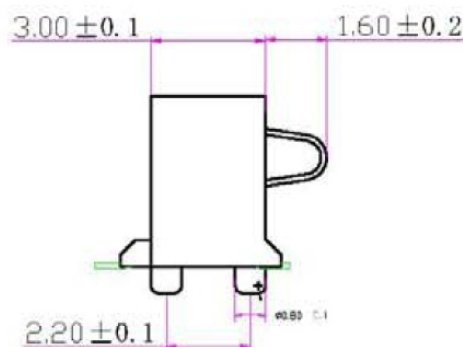

PCB Layout

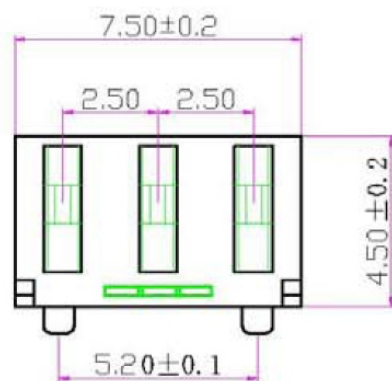

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W45EP3-03-LF

SERIES POST 03 WAY LEADFREE
EAR HIGH 4.50mm
90°SMT

DESCRIPTION: 2.5PH 4.2H 3P 側壓電池座