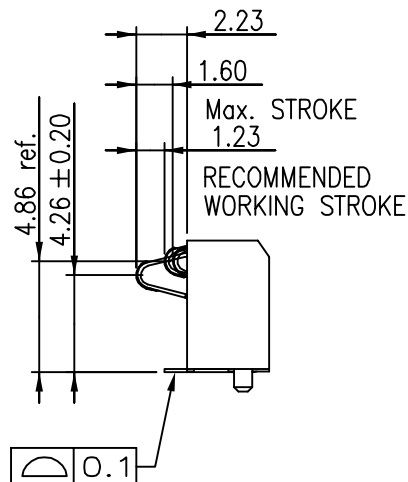
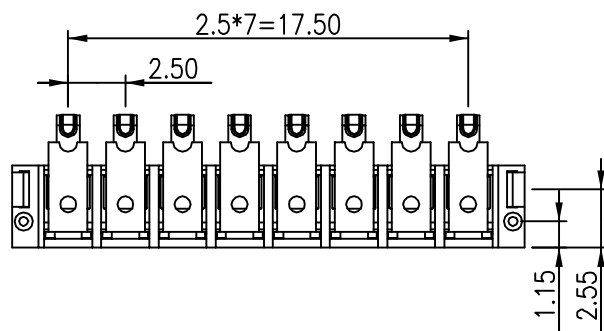
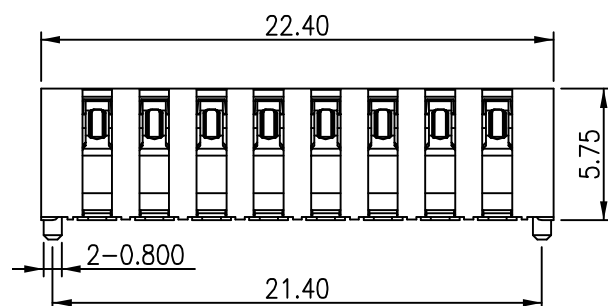
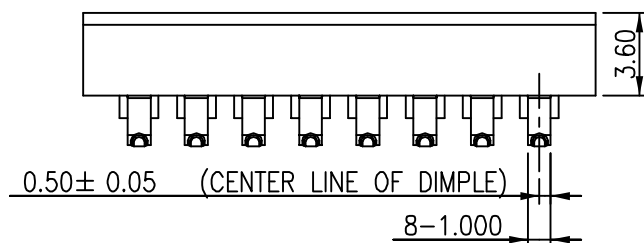


NOTE :

1.MATERIAL:

HOUSING:HIGH TEMP. THERMOPLASTIC,UL94V-0,COLOR BLACK

CONTACT:COPPER ALLOY,T=0.15

TAB:COPPER ALLOY,T=0.15

2.FINISH:

CONTACT:


Au > 1u" GOLD PLATING ON CONTACT AREA;
GOLD FLASH PLATING ON SOLDER TAILS;
NICKEL UNDERPLATING OVER ALL.

TAB:

MATTE TIN OVER ALL

3.SOLDER HEAT RESISTANCE: REFLOW SOLDERING 260° FOR 5 SEC.

4.FOR REFLOW SOLDERING LEAD FREE PROCESS.

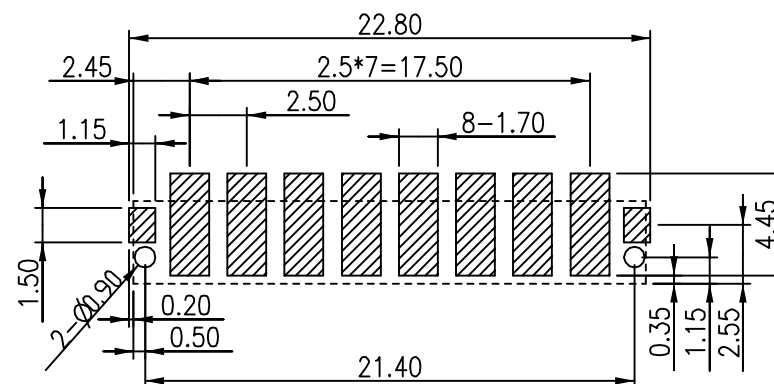

RECOMMENDED PC. BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W57EP2-08-LF

SERIES

POST

08 WAY

EAR

HIGH 5.75mm

90°SMT

LEADFREE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: