

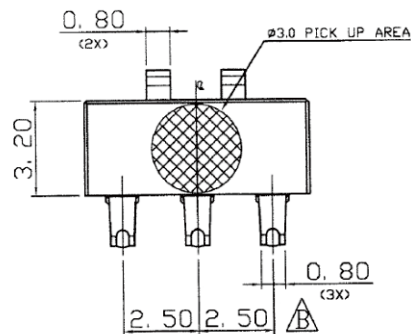
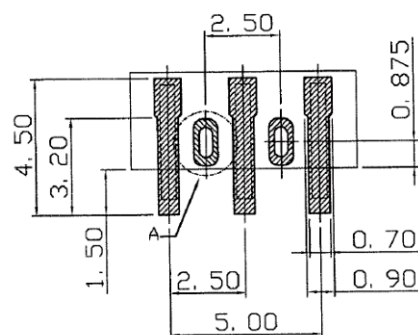



3D VIEW

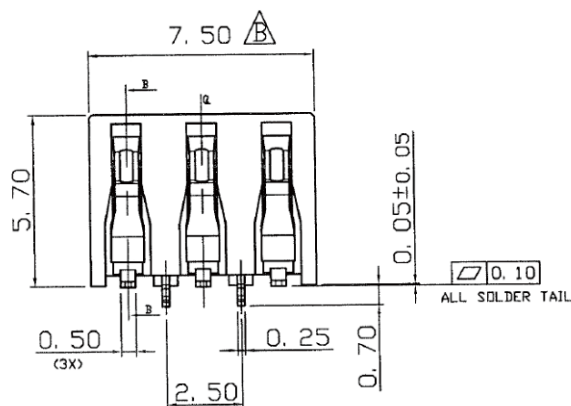

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05mm

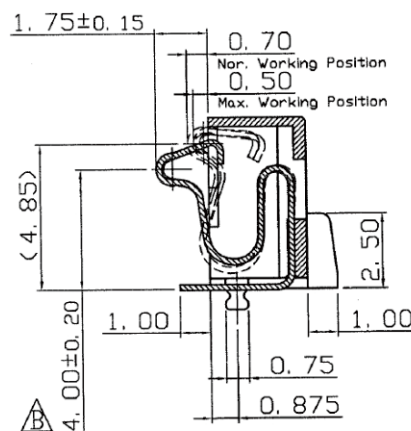

SECTION B-B



DETAIL A

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: LCP E130I, UL94 V-0, COLOR: BLACK
 - 1.2 CONTACT: Ti-Cu, NKT322-ESH
 - 1.3 POST: BRASS, C2680-H
2. FINISH:
 - 2.1 CONTACT:
 - GOLD PLATING ON CONTACT AREA,
 - GOLD FLASH PLATING ON SOLDER TAIL,
 - NICKEL UNDERPLATING OVERALL.
 - 2.2 POST:
 - MATTE TIN PLATING OVERALL,
 - NICKEL UNDERPLATING OVERALL.
3. NORMAL FORCE: 1.5N Min. @ 0.70mm FROM HOUSING
4. DURABILITY: 10000 CYCLES
5. ROHS PRODUCT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BCS25-W57M-03-LF

SERIES

LEADFREE

03 WAY

METAL FOOT

HIGH 5.7mm

90°SMT

DESCRIPTION: