

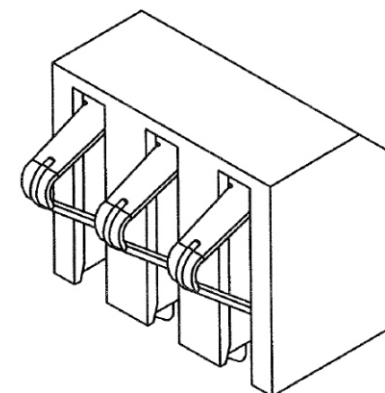
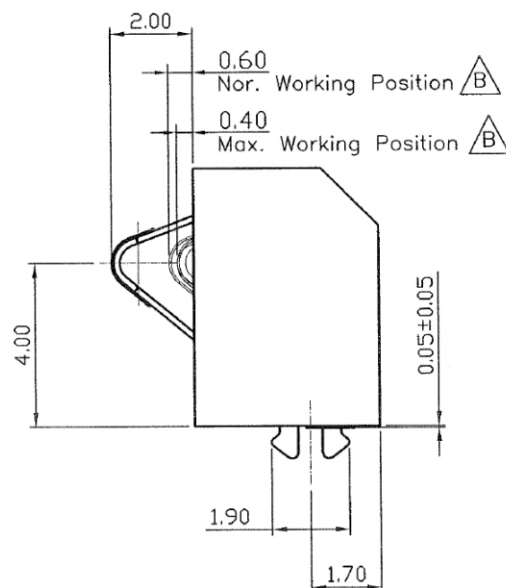
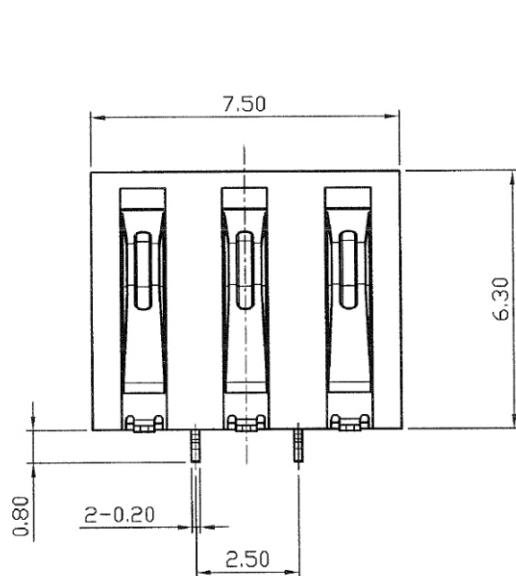


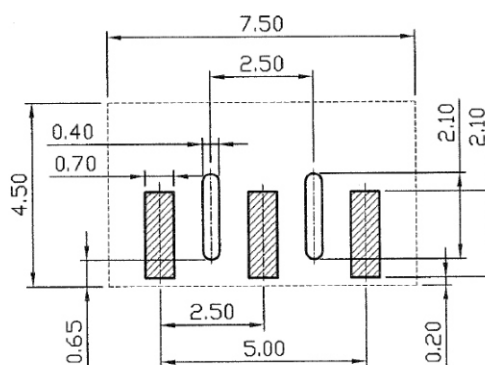

△ NOTES:

- 1.MATERIAL:
1-1.HOUSING:LCP UL 94V-0 BLACK
1-2.CONTACT:COPPER ALLOY,
Au 30u",Ni 50u"Min.
1-3.BOARD LOCK:COPPER ALLOY
Sn 100~150u",Ni 50u"Min.
- 2.NORMAL FORCE:120g Min. @0.60mm
FROM HOUSING
- 3.LIFE CYCLE:5000 Min.
- 4.CURRENT CAPACITY:1.0A
- 5.COPLANARITY:0.10mm Max.

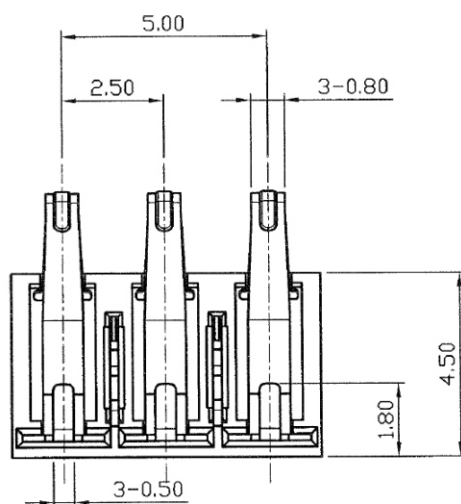

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS25-W63Z-03-LF

SERIES
CLIP
HIGH 6.30mm
90°SMT
LEADFREE
03 WAY

DESCRIPTION: