

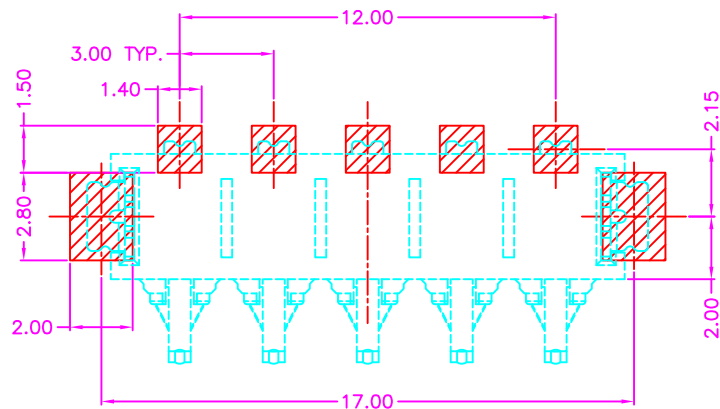
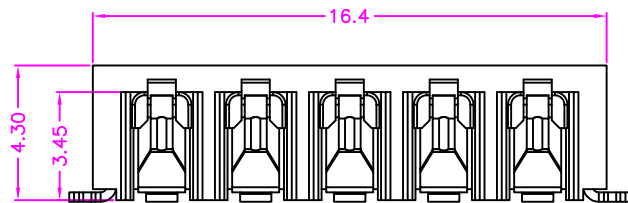
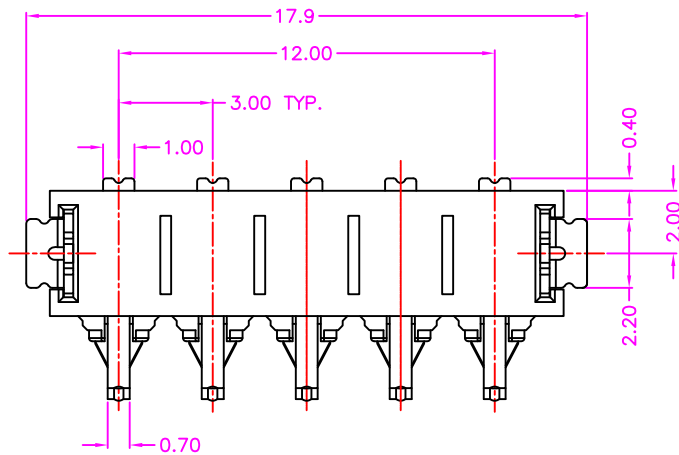


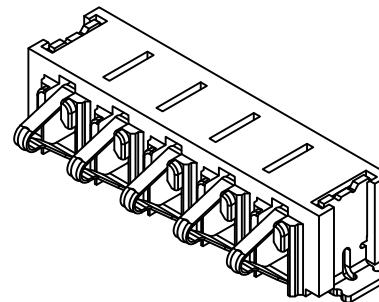

P.C.B. LAYOUT
TOP VIEW ± 0.05

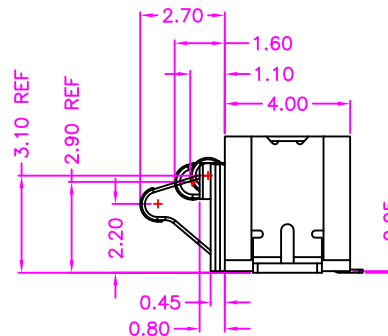


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SOLDER PAD: COPPER ALLOY, GOLD PLATED
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 3 AMP MAX
DIELECTRIC WITHSTANDING: 350V AC FOR ONE MINUTE
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 250V
OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

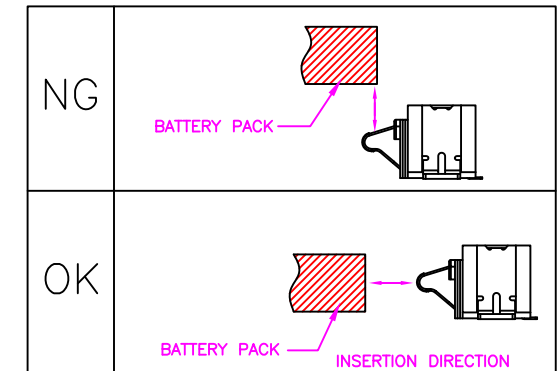

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BCS30-W34E1-05-LF

SERIES

LEADFREE

05 WAY

EAR

HIGH 3.45mm

90°SMT

DESCRIPTION: BATTERY, 3.00mm PITCH, PCB MOUNT, R/A SMT, WITH PAD, FEMALE