
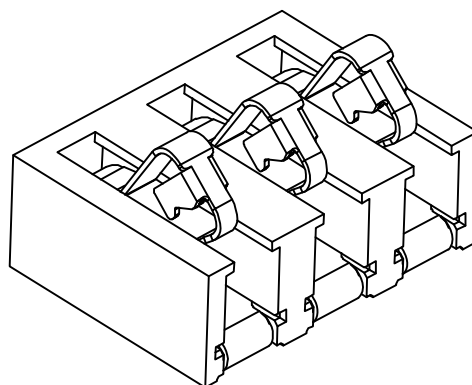
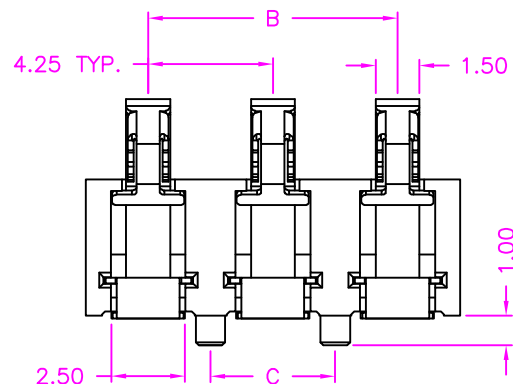
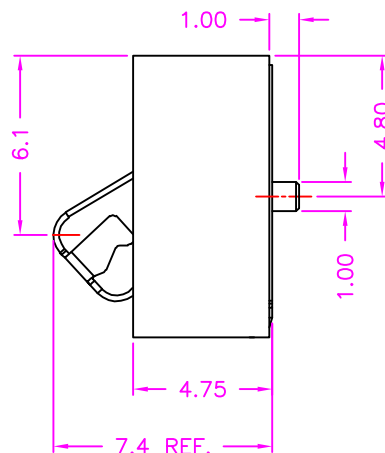


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED


SPECIFICATION

CURRENT RATING: 3 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

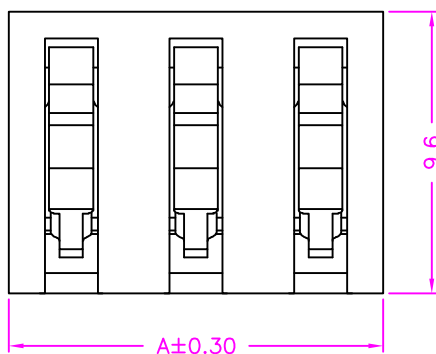

TABLE

POS.	DIM A	DIM B	DIM C
03	12.75	8.50	4.25
04	17.00	12.75	8.50
05	21.25	17.00	12.75
06	25.50	21.25	17.00

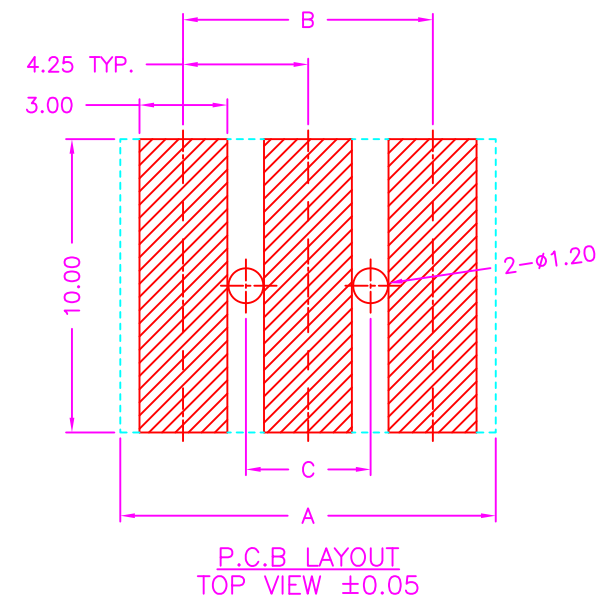

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS43-V47P1-xx-LF

SERIES

LEADFREE
03-06 WAY
POST
HIGH 4.75mm
180°SMT

DESCRIPTION: BATTERY, 4.25mm PITCH, PCB MOUNT, VERTICAL SMT, WITH POST