
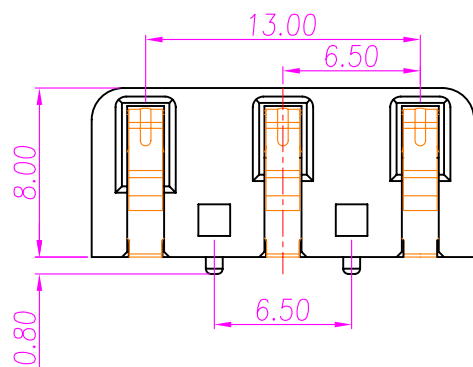
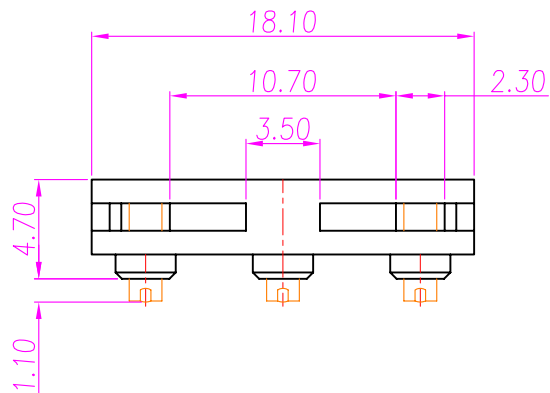


RECOMMENDED PCB LAYOUT

NOTE:

SPECIFICATIONS:

1.GENERAL REQUIREMENTS:

- 1-1 OPERATING TEMPERATURE RANGE:-40°C TO +85°C
- 1-2 STORAGE TEMPERATURE RANGE:-40°C TO +100°C
- 1-3 HUMIDITY RANGE:10%RH TO 80%RH

2.ELECTRICAL REQUIREMENTS:

- 2-1 RATED CURRENT(PER CONTACT):1.0 AMPS CONTINUOUS
- 2-2 RATED VOLTAGE(PER CONTACT):200 VAMS AT SEA LEVEA
- 2-3 INSULATION RESISTANCE(I.R):8 MEGAOHMS Min.
- 2-4 CONTACT RESISTANCE(PER CONTACT) Max: 50 MILLIOHMS.

3.MATERIAL:

- 3-1 CONTACT:BERYLLIUM BRONZE. Δ
- 3-2 HOUSING:SEE TABLEA
- 3-3 PLATING:CONTACT GOLD 30u" REMNANT GOLD FLASH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BCS65-W80P-03-LF

SERIES LEADFREE
03 WAY
POST
HIGH 8.0mm
90°SMT

DESCRIPTION: 3PIN 充電座-2