
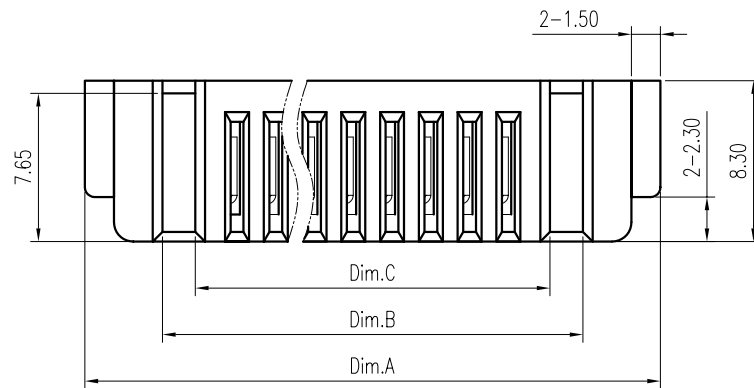



Section F-F

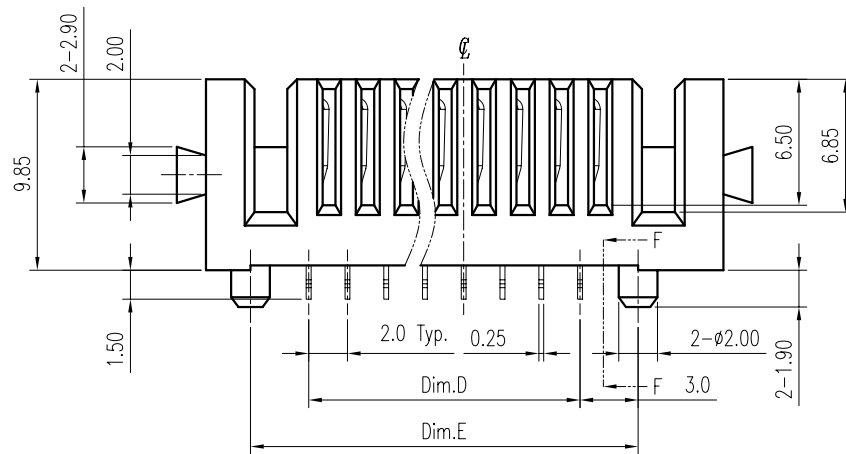


Notes:

- Material :
Housing : Thermoplastic UL 94V-0, Black
Terminal : Copper Alloy
- Finish :
Terminal : Selected Gold on Contact Area,
1u" Min. Gold on Solder Tails,
Both over 40u" Ni Under-plated Overall

Dimension Information:

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
BCT20-SD098P-04	4	4	21.7	13.7	10.3	6.0	12.0
BCT20-SD098P-05	5	5	23.7	15.7	12.3	8.0	14.0
BCT20-SD098P-06	6	6	25.7	17.7	14.3	10.0	16.0
BCT20-SD098P-07	7	7	27.7	19.7	16.3	12.0	18.0
BCT20-SD098P-08	8	8	29.7	21.7	18.3	14.0	20.0
BCT20-SD098P-09	9	9	31.7	23.7	20.3	16.0	22.0

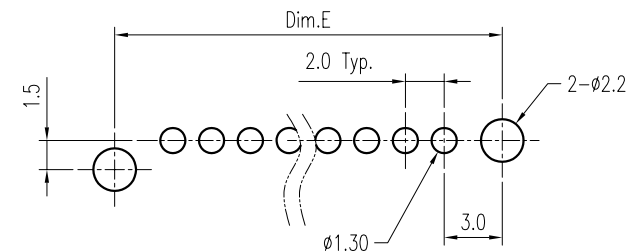

Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

BCT20-SD098P-xx-LF

SERIES

LEADFREE

04-09 WAY

POST HIGH 9.85mm

DIP 180°

FEMALE

DESCRIPTION: 2.0mm Pitch Battery Conn. Female Type

煜倫股份有限公司

www.morethanall.com