


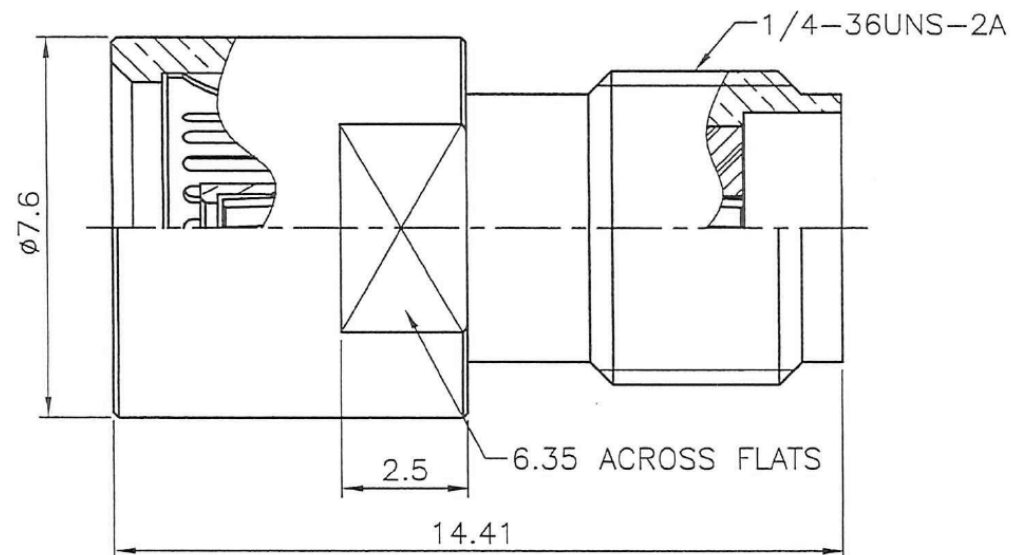

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER ELECTROLESS NICKEL PL 10~20 THICK OVER COPPER PL 40 THICK
4. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
5. BERYLLIUM COPPER PER QQ-C-530

	SPRING	NOTE 5	NOTE 3		
	CONTACT PIN	NOTE 1	NOTE 4		
	CONTACT PIN	NOTE 5	NOTE 4		
	INSULATOR	PTFE	WHITE		
	BODY	NOTE 1	NOTE 2		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5°

照片框

ORDER INFORMATION

BMASMA-FS-50-LF

SERIES

LEADFREE

50 OHM

FEMALE TO FEMALE

DESCRIPTION: BMA JACK TO SMA JACK ADAPTOR