

. 1 IMPEDANCE/阻抗

50 Ω

1.3VSWR/驻波

0~6GHz

1.4TEMPERATURE RANGE/温度范围

$$-45^{\circ} \sim +125^{\circ}$$

1.5CENTER CONTACT RESISTANCE/中心接触电阻

 $\leq 3M \Omega$

1.60 OUTER CONTACT RESISTANCE/外部接触电阻

 $\leq 2M\Omega$

1.7 INSULATOR RESISTANCE/绝缘电阻

 $\geq 5000\text{M}\Omega$

1.8 DIELECTRIC WITHSTANDING VOLTAGE/介质耐压

1000VRMS

1.9DURABILITY/耐久性


500CYCLES

2. 1SHELL, BODY=STAINLESS STEEL/壳体不锈钢

2. 2INNER CONTACT=BERYLLIUM-OR TIN BRONZE, GOLD PLATED/内导体铍铜或磷铜镀金

2.3 INSULATOR=PTFE/绝缘体聚四氟乙烯

2. 4RoHS COMPLIANT/符合RoHs

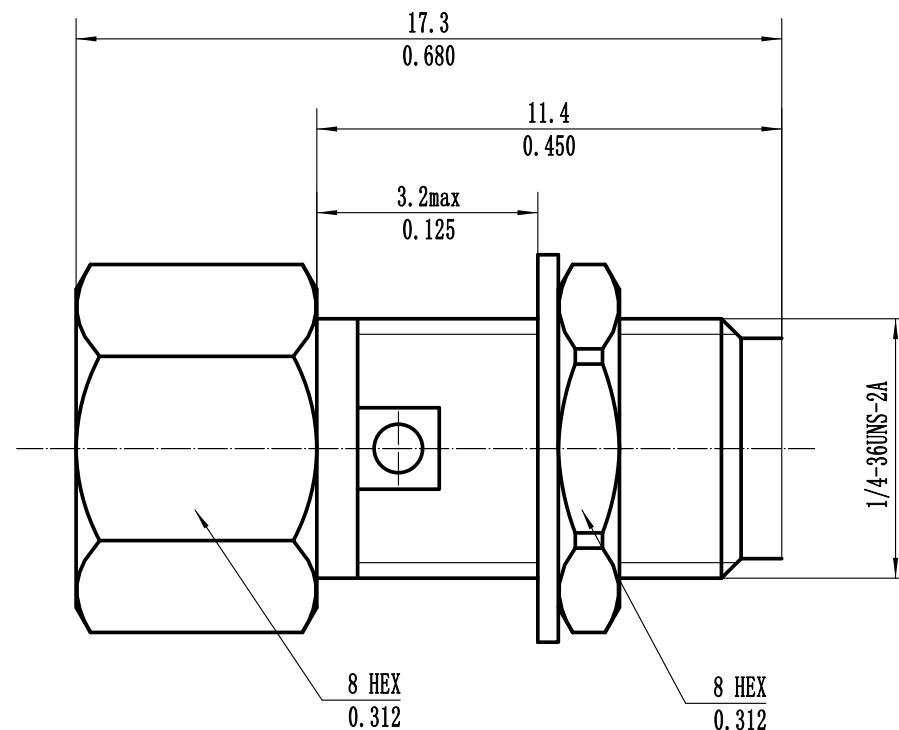

TOLERANCES ARE

DRAWING BY CY

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.05
ANG ± 1°

CHECKED BY GENIUS

UNIT / mm	SCALE 1 : 1
-----------	-------------

DATE

PJECTION 

照片框

ORDER INFORMATION

BMASMA-FSPANW-50-LF

SERIES

LEADFREE

0 OHM

NUT + WASHER

PANEL FRONT

FEMALE TO FEMALE

DESCRIPTION: