
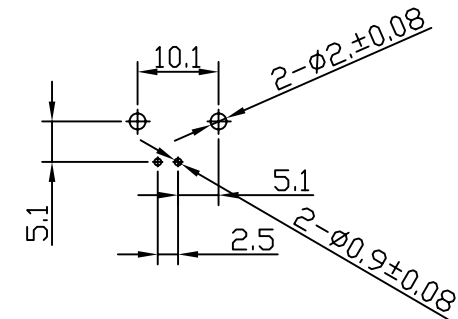

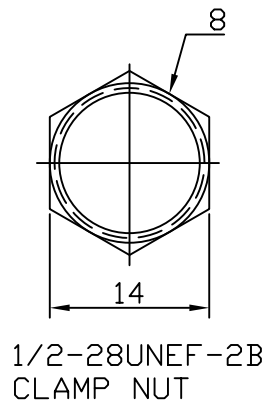

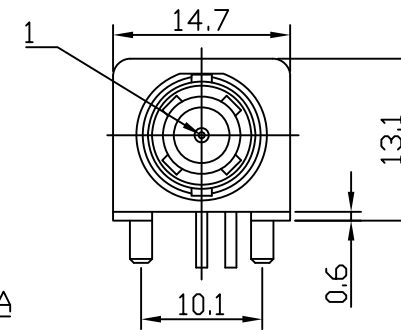
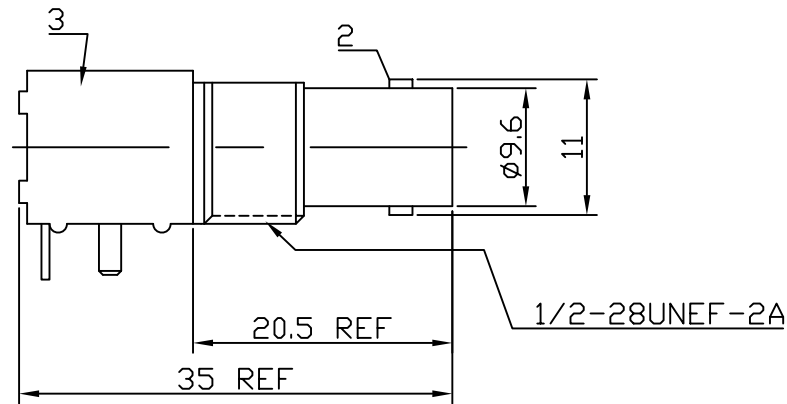


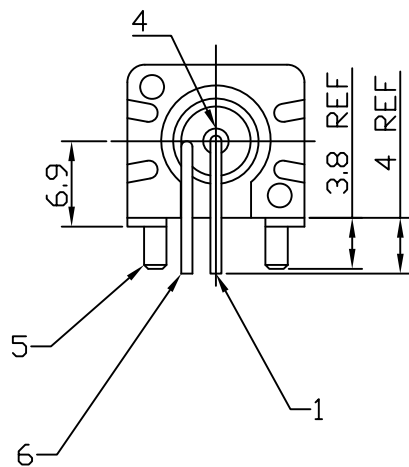

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS:5.5MM
RECOMMENDED MOUNTING TORQUE:
12 INCH-POUNDS MAX

8	NUT	BRASS	NICKEL	1
7	WASHER	STEEL	NICKEL	1
6	SOLDER TAIL	BRASS WIRE	TIN	1
5	MOUNTING POST	BRASS	TIN	1
4	INSULATOR	DELIN	NONE	1
3	HOUSING	PBT	NONE	1
2	BODY	ZINC ALLOY	NICKEL	1
1	CENTER CONTACT	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

0.5-5	=±0.2
6-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4

照片框

ORDER INFORMATION

BNC-JR13WWHGT-75-LF

SERIES JACK DIP 90° WHITE WASHER+NUT HIGH 13.10mm LEADFREE 75 OHM GOLD+TIN TAIL

DESCRIPTION: BNC CONNECTOR, PCB/PANEL MOUNT JACKS