
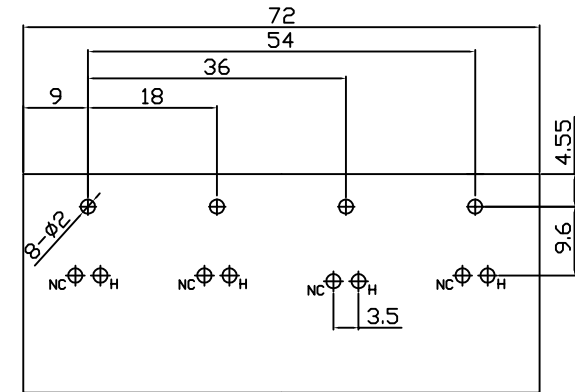
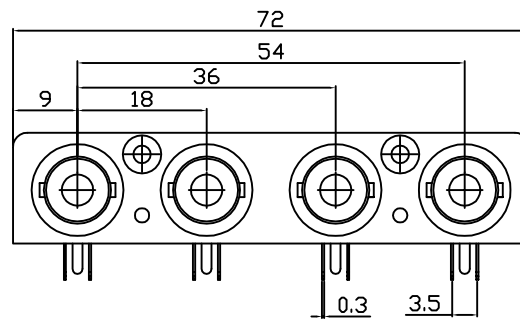

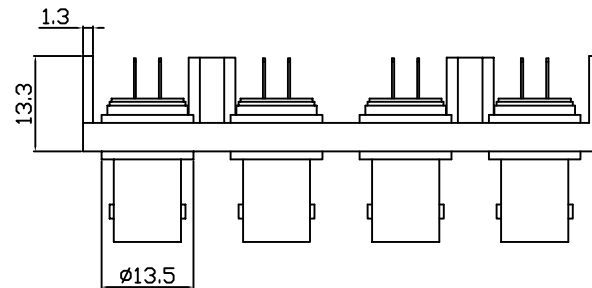


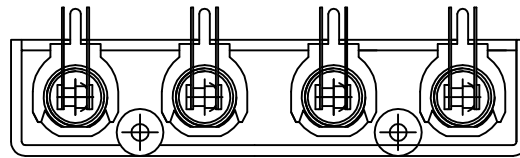

1.MATERIALS :

a. BODY : ZINC ALLOY,DIE CASTIN NICKEL PLATED.

b. CONTACT: BRASS GOLD PLATED.

c. BRACKET: A.B.S.

d. INSULATOR: ENGINEER PLASTIC POM.

2.NOMIAL IMPEDENCE 50(75)OHMS.

3.FREQUENCY RANGE: 0-2 GHZ.

4.MAX PEAK VOLTAGE: 500V

5.DIELECTRIC STRENGTH WITHSTAND 1.5KV NNS.

6.INSULATION RESISTANCE AT 500 VDE 5000 MEGOHMS MAL.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0.5-5 =±0.2
5-30 =±0.4
30-120 =±0.6
120-315 =±1
315-1000 =±1.6
1000-2000 =±2.4

照片框

ORDER INFORMATION

BNCA4-JRE2SW-xx-LF

SERIES JACK EAR SWITCH LEADFREE
50:50 OHM
75:75 OHM
DIP 90°

DESCRIPTION: BNC FEMALE R/A 1*4 PORT<4顆都開關>