

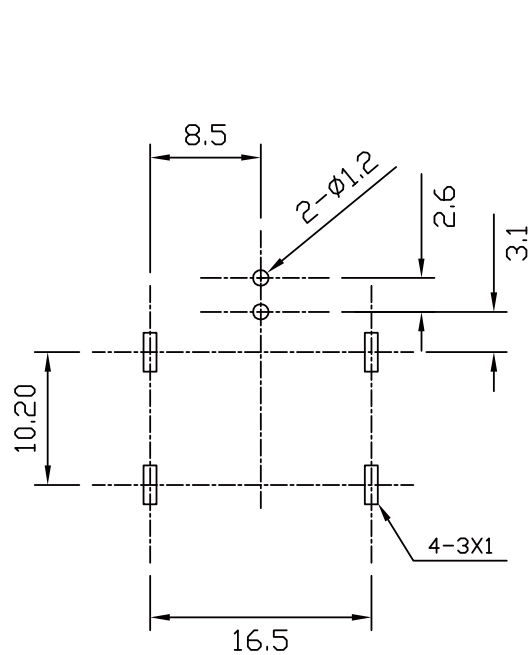


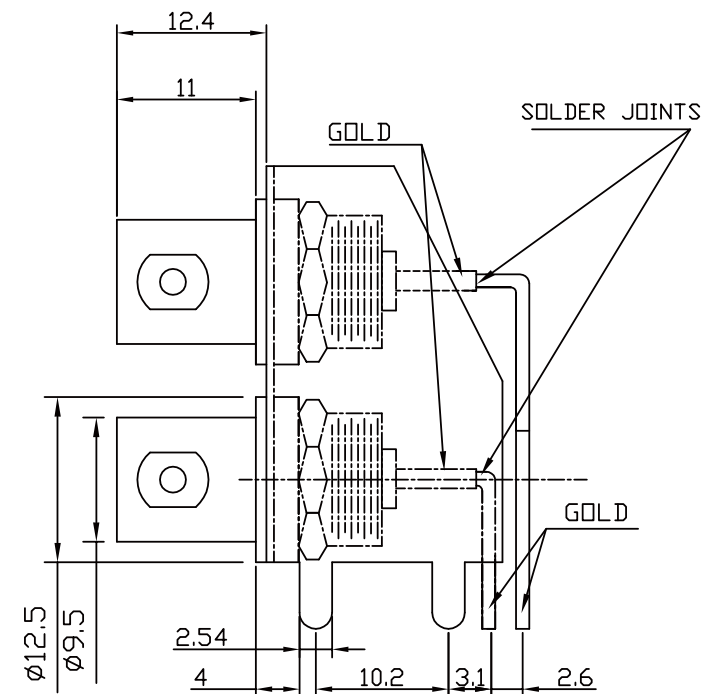

PCB LAYOUT
(RECOMMENDED)

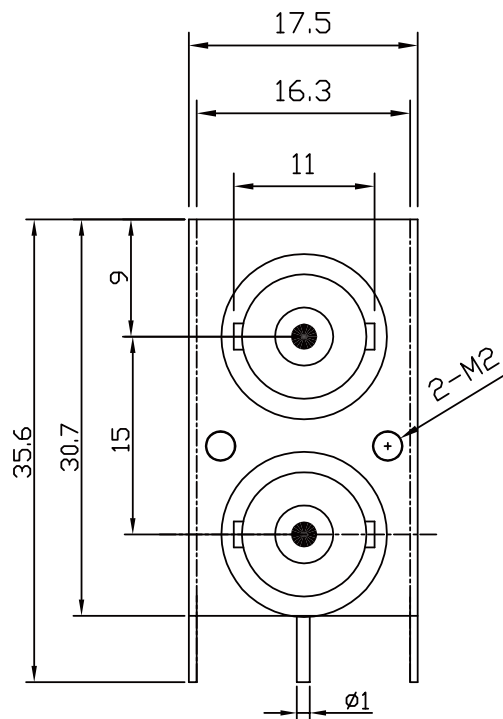


5	NUT	STEEL	NICKEL	2
4	WASHER	STEEL	NICKEL	2
5	INSULATOR	POM	NONE	2
4	BODY	ZINC	NICKEL	2
3	PIN(SD)	BRASS	GOLD	2
2	BRACKET	FE	NICKEL	1
1	CENTER CONTACT	BRASS	GOLD	2
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

0.5-5	±0.2
5-30	±0.4
30-120	±0.6
120-315	±1
315-1000	±1.6
1000-2000	±2.4



ORDER INFORMATION

BNCB1-JR15E2-75-LF

SERIES LEADFREE
75 OHM
EAR
JACK 15.0mm PORT
DIP 90°

DESCRIPTION: BNC CONNECTOR 75OHM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION